


FKOC/LM - Βάνες Πεταλούδα

Hand operated Butterfly valve

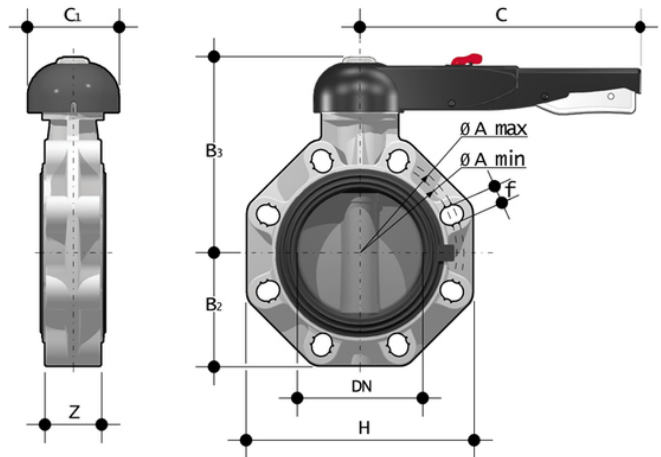

EPDM

Κωδικός προϊόντος	tooltplimage	d-Size	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z	g
FKOALM050E	-	50 - 1"1/2	40	16	99	109	60	137	175	100	132	4	33	918
FKOALM063E	-	63 - 2"	50	16	115	125,5	70	143	175	100	147	4	43	1081
FKOALM075E	-	75 - 2"1/2	65	10	128	144	80	164	175	110	165	4	46	1254
FKOALM090E	-	90 - 3"	80	10	145	160	93	178	272	110	185	12	49	1987
FKOALM110E	-	110 - 4"	100	10	165	190	107	192	272	110	211	8	56	2405
FKOALM140E	-	140 - 5"	125	10	204	215	120	212	330	110	240	8	64	3347
FKOALM160E	-	160 - 6"	150	10	230	242	134	225	330	110	268	8	70	4212
FKOALM225E	-	225 - 8"	200	10	280	298	161	272	420	122	323	8	71	7250

FKM

Κωδικός προϊόντος	tooltplimage
FKOALM050F	-
FKOALM063F	-
FKOALM075F	-
FKOALM090F	-
FKOALM110F	-
FKOALM140F	-
FKOALM160F	-



FKOC/LM - Βάνες Πεταλούδα

Κωδικός Προϊόντος	tooltipImage
FKOALM225F	-



FKOC/LM – Βάνες Πεταλούδα

- Ergonomic handle in HIPVC equipped with **locking and unlocking device, release, quick operation and graduated adjustment** in 10 intermediate positions (DN 40Γ·200). The operating range, starting from the first few degrees of valve opening, also guarantees extremely low pressure drops.
- **Customisable Labelling System:** integrated module in the handle, made of a transparent protection plug and a customisable tag holder using the LSE set (available as an accessory). The **customisation** lets you **identify the valve on the system** according to specific needs.
- **STAINLESS steel square section stem** completely isolated from the fluid complying with standard ISO 5211: DN 40Γ·65: 11 mm DN 80Γ·100: 14 mm DN 125Γ·150: 17 mm DN 200: 22 mm DN 250Γ·300: 27 mm
- **Body** in polypropylene based **compound reinforced with fibreglass (PP-GR)** **resistant to UV rays** and characterised by **high mechanical strength**.
- **Drilling pattern using oval slots** that allow coupling to flanges according to numerous international standards. The special **self-centring inserts in ABS** supplied for DN 40Γ·200 guarantee the **correct axial alignment** of the valve during installation. For DN 250Γ·400 valves, the drilling pattern for the selfcentring system is of the traditional type according to DIN and ANSI standards.
- **Interchangeable liner** with the dual function of forming a hydraulic seal and isolating the body from the fluid.
- Interchangeable Disk in PVC-C with through shaft, available in different thermoplastic materials: PVC-U, PP-H, ABS, PVDF
- Overall dimensions of the valve in accordance with standard ISO 5752 (DN 40Γ·200 Medium Series 25, DN 250Γ·300 Long Series 16) and DIN 3202 K2 and ISO 5752 (DN 65Γ·200 K2, DN 250Γ·300 K3)
- Can also be installed as an end line valve, bottom discharge valve or tank dump valve
- **Special Lug version** PN 10 fully drilled to DIN 2501 or ANSI B16.5 cl.150 with **molded-in AISI 316 stainless steel threaded inserts**
- Possibility of installing a manual reducer or pneumatic and/or electric actuators by applying ISO standard drilling pattern PP-GR flanges. DN 40 Γ·200 valve fitted with plate with rack in PP-GR. For actuated versions with flange drilled according to ISO 5211 F05, F07, F10
- DN 250Γ·300 valve, fitted with one-piece top flange in high mechanical strength PP-GR with mounting flange for internal components with drilling according to standard ISO 5211 F10, F12, F14
- Possibility to have handle with integrated LSQT limit micro switch, even as a retrofit in existing installations