


USTM

Transition Fittings HD-PE/Steel with female thread

Compact transition fitting. HD-PE end with exposed heating coils for optimal heat transfer, large insertion depth, wide fusion zone plus cold zones at the end and in the transition area to prevent the flow of molten material for use without holding devices. Steel end permanently anchored in the HD-PE. Self sealing patented sealing geometry without elastomer seal. For use in gas systems.

Other thread sizes on request

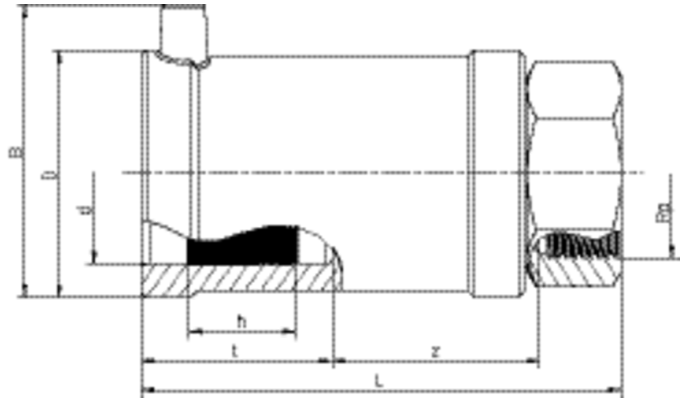

PE 100 SDR 11

Maximum working pressure 5 bar (gas)



Κωδικός προϊόντος	d	Rp	BX	PU	D	L	t	z	h	B	Weight kg
612570	32	1"	20	1080	47	112	42	49	24	61	0,350
612572	40	1 1/4"	20	800	58	121	46	53	30	70	0,510
612574	50	1 1/2"	15	600	70	136	53	60	30	80	0,650
612576	63	2"	10	400	84	141	53	61	35	94	1,020

Other thread sizes on request

FRIALEN safety fittings can be fused to pipes SDR11 - SDR 17,6, minimum wall thickness $s_{min} \geq 3$ mm. Other SDR-stages on request. Please observe the marking directly at the product, which is mandatory. DVGW-Registration No. DV-7501AU2256

USTM

Transition Fittings HD-PE/Steel with female thread

Areas of Application

FRIALEN-Transition Fittings USTM are threaded joints as an adaptor from a metal pipe with external thread to a HD-PE pipe. Joint on the part of HD-PE by FRIALEN-Coupler.

Assembly Instructions

The threaded component must be held with a spanner to prevent it twisting in the HD-PE component. The fusion of the HD-PE side takes place by FRIALEN-fusing – leakproof and longitudinally strong.

The installation of the steel and the HD-PE side has to be prepared according to the general installation instructions (see "Transition Fittings with threaded connection" in "Assembly Instructions" for "FRIALEN-Safety Fittings for house connections and distribution pipes up to d 225"). This involves removing the oxide skin and cleaning the pipe ends.

Good reasons for using the FRIALEN-USTM:

Compact construction

HD-PE side with exposed heating element for optimal heat transfer

Cold zones at the end to prevent the flow of molten material

No holding clamps required

Large insertion depth, extra wide fusion zones

Steel end permanently anchored in the HD-PE and will not distort

Self sealing patented sealing geometry without elastomer seal

Additional barcode for tracing back the fitting (Traceability-Coding)