


ASF

Ελαστικός δακτύλιος (αντάπτορας)

as joining element between concrete inspection chamber and FRIAFIT-Sewage Insert Sleeve (AEM)

Connecting element between precast concrete manhole and the FRIAFIT sewage insert sleeve AEM. Anchoring webs (T section) around the entire width for a secure seat in the concrete. Defined inner surface for reliable system seal with AEM. Stable inside diameter due to large wall thickness. Flush connection (inside and outside) at bottom of concrete manhole (DIN 4034).

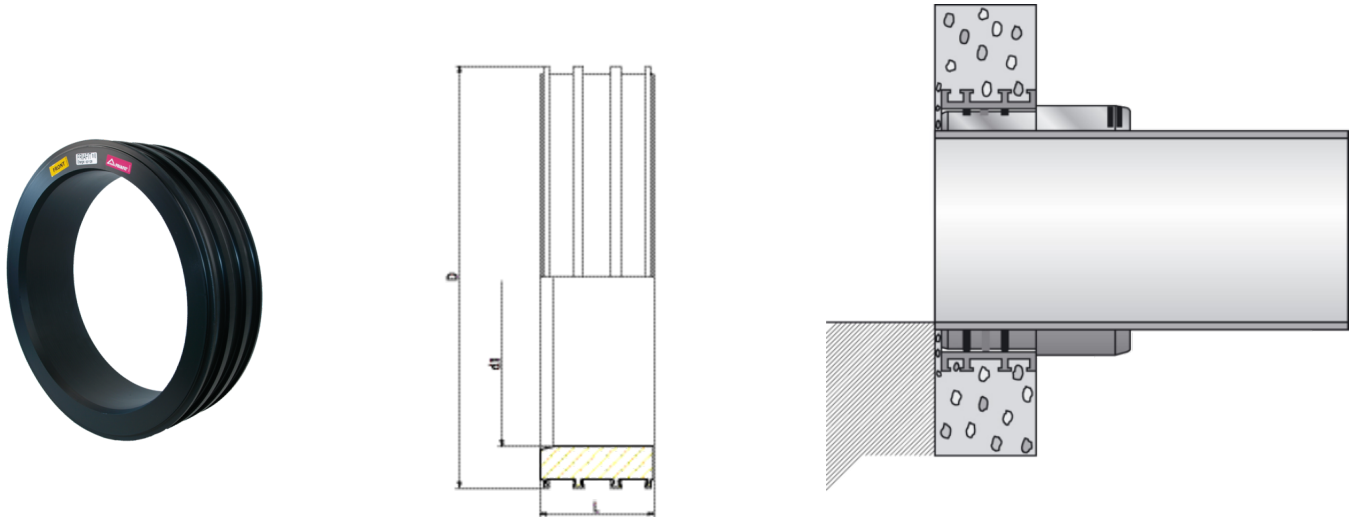

PE 100

Maximum testing pressure 0.5 bar in accordance to DIN EN 1610

Κωδικός προϊόντος	product.detail.attribute.d1Small	Pipe Diameter	BX	PU	D	L	Weight kg
680401	134	110	12	96	200	135	1,600
680402	190	160	8	64	250	135	1,900
680403	218	180	6	48	280	135	2,300
680404	250	200	4	32	315	135	2,700
680405	280	225 250	4	32	355	135	3,700
680407	316	280	4	32	400	135	4,800
680408	357	315	1	18	450	135	6,200
680409	402	355	1	18	500	135	7,400
680410	452	400	1	12	560	135	9,300
680411	502	450	3	6	630	135	12,700
680414	562	500	3	6	670	135	11,300
680412	628	560	3	6	710	135	8,800
680413	713	630	3	6	800	135	10,700

Hinweis: Bei Einsatz von Rohrdimensionen $\geq d 710$ wenden Sie sich bitte an unsere Hotline 0621/486-1896.

ASF

Ελαστικός δακτύλιος (αντάπτορας)

Sewage pipe systems are high-value assets of a value which has to be maintained for a long time. Increasing demands on the public sewage system require materials which meet these criteria. HDPE sewage pipes have been fused for many years with the FRIAFIT HDPE sewage system tightly, frictionlocked and root-proof.

Areas of Application

The FRIAFIT-Sewage Inspection Chamber Adapter ASF is the joining element between concrete inspection chamber according to DIN 4034 and the FRIAFIT-Sewage Insert Sleeve AEM.

Assembly Instructions

The ASF is usually fitted in at the concrete works during manufacture of the inspection chambers. Application of the ASF is possible even on local concrete inspection chambers.

The ASF Sewage Inspection Chamber Adapter is installed according to the general installation requirements (see also "Fitting Instructions" of the FRIAFIT-Sewage System).

Good reasons for using the FRIAFIT-Sewage Inspection Chamber Adapter ASF

The ASF is a corrosion resistant HDPE construction part

Stable internal diameter due to big wall thickness

Anchoring ribs twisted at the rear across the entire width ensure proper and leakfree anchoring in the concrete

Width of component and connection HDPE/concrete correspond to DIN 4034

Defined internal area for the reliable system sealing (AEM)

For subsequent installation in bricks chambers a longer version **ASF**L (L = 250 mm) was developed