


FKOM/LM - Βάνα Πεταλούδας

Hand operated Butterfly valve

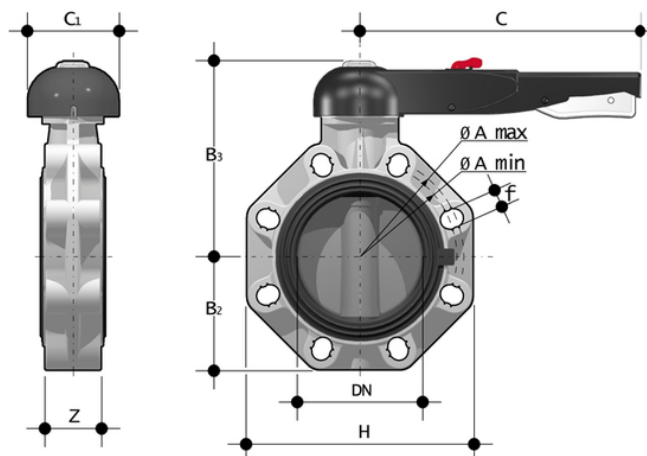

EPDM

Κωδικός προϊόντος	tooltiplmage	d - Size	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z	g
FKOMLM050E	-	50 - 1"1/2	40	10	99	109	60	137	175	100	132	4	33	800
FKOMLM063E	-	63 - 2"	50	10	115	125,5	70	143	175	100	147	4	43	980
FKOMLM075E	-	75 - 2"1/2	65	10	128	144	80	164	175	110	165	4	46	1370
FKOMLM090E	-	90 - 3"	80	10	145	160	93	178	175	100	185	12	49	1770
FKOMLM110E	-	110 - 4"	100	10	165	190	107	192	272	110	211	8	56	2120
FKOMLM140E	-	125/140 - 5"	125	10	204	215	120	212	330	110	240	8	64	3000
FKOMLM160E	-	160*/180* - 6"	150	10	230	242	134	225	330	110	268	8	70	3750
FKOMLM225E	-	200*/225* - 8"	200	10	280	298	161	272	420	122	323	8	71	6650

FKM

Κωδικός προϊόντος	tooltiplmage	d - Size	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z	g
FKOMLM050F	-	50 - 1"1/2	40	10	99	109	60	137	175	100	132	4	33	800
FKOMLM063F	-	63 - 2"	50	10	115	125,5	70	143	175	100	147	4	43	980
FKOMLM075F	-	75 - 2"1/2	65	10	128	144	80	164	175	110	165	4	46	1370
FKOMLM090F	-	90 - 3"	80	10	145	160	93	178	175	100	185	12	49	1770
FKOMLM110F	-	110 - 4"	100	10	165	190	107	192	272	110	211	8	56	2120
FKOMLM140F	-	125/140 - 5"	125	10	204	215	120	212	330	110	240	8	64	3000
FKOMLM160F	-	160*/180* - 6"	150	10	230	242	134	225	330	110	268	8	70	3750

FKOM/LM - Βάνα Πεταλούδας

Κωδικός Προϊόντος	tooltiplmage	d - Size	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z	g
FKOMLM225F	-	200*/225* - 8"	200	10	280	298	161	272	420	122	323	8	71	6650

FKM

Κωδικός Προϊόντος	tooltiplmage	d - Size	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z	g
FKOMLM050F0SF	-	50 - 1"1/2	40	10	99	109	60	137	175	100	132	4	33	800
FKOMLM063F0SF	-	63 - 2"	50	10	115	125,5	70	143	175	100	147	4	43	980
FKOMLM075F0SF	-	75 - 2"1/2	65	10	128	144	80	164	175	110	165	4	46	1370
FKOMLM090F0SF	-	90 - 3"	80	10	145	160	93	178	175	100	185	12	49	1770
FKOMLM110F0SF	-	110 - 4"	100	10	165	190	107	192	272	110	211	8	56	2120
FKOMLM140F0SF	-	125/140 - 5"	125	10	204	215	120	212	330	110	240	8	64	3000
FKOMLM160F0SF	-	160*/180* - 6"	150	10	230	242	134	225	330	110	268	8	70	3750

FKOM/LM - Βάνα Πεταλούδας

- **Ergonomic handle** in HIPVC equipped with **locking and unlocking device, release, quick operation and graduated adjustment** in 10 intermediate positions (DN 40Γ·200). The operating range, starting from the first few degrees of valve opening, also guarantees extremely low pressure drops.
- **Customisable Labelling System**: integrated module in the handle, made of a transparent protection plug and a customisable tag holder using the LSE set (available as an accessory). The **customisation** lets you **identify the valve on the system** according to specific needs.
- **STAINLESS steel square section stem** completely isolated from the fluid complying with standard ISO 5211: DN 40Γ·65: 11 mm DN 80Γ·100: 14 mm DN 125Γ·150: 17 mm DN 200: 22 mm DN 250Γ·400: 27 mm
- **Body** in polypropylene based **compound reinforced with fibreglass (PP-GR)** **resistant to UV rays** and characterised by **high mechanical strength**.
- **Drilling pattern using oval slots** that allow coupling to flanges according to numerous international standards. The special **self-centring inserts in ABS** supplied for DN 40Γ·200 guarantee the **correct axial alignment** of the valve during installation. For DN 250Γ·400 valves, the drilling pattern for the selfcentring system is of the traditional type according to DIN and ANSI standards.
- **Interchangeable liner** with the dual function of forming a hydraulic seal and isolating the body from the fluid.
- Interchangeable Disk in PP-H with through shaft, available in different thermoplastic materials: PVC-U, PVC-C, ABS, PVDF Overall dimensions of the valve in accordance with standard ISO 5752 (DN 40Γ·200 Medium series 25, DN 250Γ·300 Long Series 16) and DIN 3202 K2 and ISO 5752 (DN DN 65Γ·200 K2, DN 250Γ·300 K3) Can also be installed as an end line valve, bottom discharge valve or tank dump valve [1:Special Lug version] PN 10 fully drilled according to DIN 2501 or ANSI B16.5 cl.150 [1:with molded-in AISI 316 stainless steel threaded inserts] [1:Valve material compatibility] (PP-H) with water conveyance, drinking water and other food substances according to current [1:regulations] Possibility of installing a manual reducer or pneumatic and/or electric actuators by applying an ISO standard drilling PP-GR flanges. DN 40 Γ· 200 valve equipped with plate with rack in PP-GR. For actuated versions with flange drilled according to ISO 5211 F05, F07, F10. DN 250Γ·300 valve, fitted with one-piece top flange in high mechanical strength PP-GR with mounting flange for internal components drilled according to standard ISO 5211 F10 (excluding DN 350Γ·400), F12, F14. Possibility to have handle with integrated LSQT limit micro switch, even as a retrofit in existing installations