


# FEOV/LM - Βάννα Πεταλούδα

Hand operated Butterfly valve

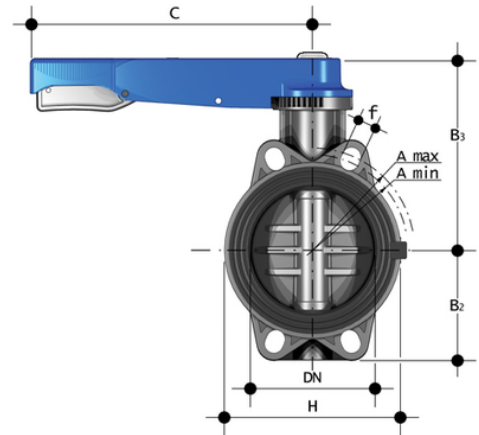

## EPDM

Κωδικός προϊόντος	tooltiplmage	d	DN	PN	A min	A max	B[5:2]	B <sub>3</sub>	C	C[5:1]	C[5:2]	f	H	U	Z	g
FEOVLM050E	-	50 - 1&quot;1/2	40	16	93,5	109	60	136	175	45	42	19	132	4	33	827
FEOVLM063E	-	63 - 2&quot;	50	16	108	124	70	143	175	45	42	19	147	4	43	1012
FEOVLM075E	-	75 - 2&quot;1/2	65	10	128	144	80	168	175	45	45	19	165	4	46	1420
FEOVLM090E	-	90 - 3&quot;	80	10	145	159	90	182	250	45	45	19	130	4	49	1640
FEOVLM110E	-	110 - 4&quot;	100	10	165	190	105	196	250	45	45	19	150	4	56	1990
FEOVLM140E	-	*140 - 5&quot;	125	10	204	215	121	215	335	45	45	23	185	4	64	3030
FEOVLM160E	-	160 - 6&quot;	150	10	230	242	132	229	335	45	45	23	210	4	70	3730
FEOVLM225E	-	**225 - 8&quot;	200	10	280	298	161	309	425	65	82	23	325	8	71	8240

## FKM

Κωδικός προϊόντος	tooltiplmage	d	DN	PN	A min	A max	B[5:2]	B <sub>3</sub>	C	C[5:1]	C[5:2]	f	H	U	Z	g
FEOVLM050F	-	50 - 1&quot;1/2	40	16	93,5	109	60	136	175	45	42	19	132	4	33	827
FEOVLM063F	-	63 - 2&quot;	50	16	108	124	70	143	175	45	42	19	147	4	43	1012
FEOVLM075F	-	75 - 2&quot;1/2	65	10	128	144	80	168	175	45	45	19	165	4	46	1420
FEOVLM090F	-	90 - 3&quot;	80	10	145	159	90	182	250	45	45	19	130	4	49	1640
FEOVLM110F	-	110 - 4&quot;	100	10	165	190	105	196	250	45	45	19	150	4	56	1990
FEOVLM140F	-	*140 - 5&quot;	125	10	204	215	121	215	335	45	45	23	185	4	64	3030
FEOVLM160F	-	160 - 6&quot;	150	10	230	242	132	229	335	45	45	23	210	4	70	3730

# FEOV/LM - Βάνα Πεταλούδα

Κωδικός προϊόντος	tooltipimage	d	DN	PN	A min	A max	B[5:2]	B <sub>3</sub>	C	C[5:1]	C[5:2]	f	H	U	Z	g
FEOVLM225F	-	**225 - 8"	200	10	280	298	161	309	425	65	82	23	325	8	71	8240

## FEOV/LM - Βάννα Πεταλούδα

- **Ergonomic multifunctional handle in HIPVC** with the option for **quick operation, graduated adjustment** in 12 positions (every 7.5B°). 180B° reversible mounting
- **Customisable Labelling System:** integrated module, made of a transparent protection plug customisable tag holder using the LSE set (available as accessory). **The customisation lets you identify the valve on the system** according to the specific needs
- **Drilling pattern with oval slots** that allow coupling to flanges according to numerous international standards
- **Interchangeable liner** with the dual function of forming a hydraulic seal and isolating the body from the fluid.
- One-piece top flange with PVC-U rack. Drilling according to standard ISO 5211 for direct drive: B£DN 40 Γ· 65: F05B£DN 80 Γ· 150: F07B£DN 200: F10
  
- Disk in PVC-U with through shaft
- **Zinc plated square section steel stem completely isolated from the fluid** complying with standard ISO 5211: DN 40 Γ· 65: 11 mm DN 80 Γ· 100: 14 mm DN 125 Γ· 150: 17 mm DN 200: 22 mm
- Can also be installed as a bottom discharge valve or tank dump valve
- **Valve material compatibility** (PVC-U) with water conveyance, drinking water and other food substances according to **current regulations**
- Possibility of directly installing a gearbox or pneumatic and/or electric actuators with a standard drilling pattern according to standard ISO 5211 F05, F07, F10