


FEOV/RM - Βάνα Πεταλούδα

Gearbox operated Butterfly valve

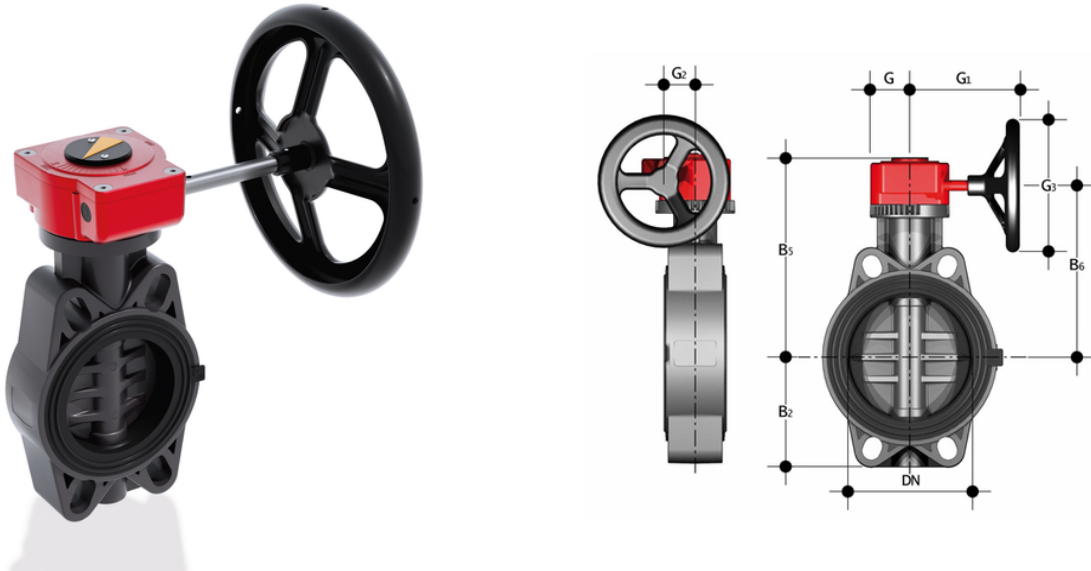

EPDM

Κωδικός προϊόντος	tooltiplmage	d	DN	PN	B[5:2]	B[5:5]	B[5:6]	G	G1	G[5:2]	G[5:3]	U	g
FEOVRM075E	-	75 - 2"1/2	65	10	80	173	145	48	135	39	125	4	2380
FEOVRM090E	-	90 - 3"	80	10	90	187	159	48	135	39	125	4	2600
FEOVRM110E	-	110 - 4"	100	10	105	201	173	48	135	39	125	4	2950
FEOVRM140E	-	*140 - 5"	125	10	121	220	192	48	144	39	200	4	4400
FEOVRM160E	-	160 - 6"	150	10	132	235	207	48	144	39	200	4	5100
FEOVRM225E	-	**225 - 8"	200	10	161	288	257	65	175	60	200	8	9260

FKM

Κωδικός Προϊόντος	tooltiplmage	d	DN	PN	B[5:2]	B[5:5]	B[5:6]	G	G1	G[5:2]	G[5:3]	U	g
FEOVRM075F	-	75 - 2"1/2	65	10	80	173	145	48	135	39	125	4	2380
FEOVRM090F	-	90 - 3"	80	10	90	187	159	48	135	39	125	4	2600
FEOVRM110F	-	110 - 4"	100	10	105	201	173	48	135	39	125	4	2950
FEOVRM140F	-	*140 - 5"	125	10	121	220	192	48	144	39	200	4	4400
FEOVRM160F	-	160 - 6"	150	10	132	235	207	48	144	39	200	4	5100
FEOVRM225F	-	**225 - 8"	200	10	161	288	257	65	175	60	200	8	9260

FEOV/RM – Βάνα Πεταλούδα

- **Ergonomic multifunctional handle in HIPVC** with the option for **quick operation, graduated adjustment** in 12 positions (every 7.5B°). 180B° reversible mounting
- **Customisable Labelling System:** integrated module, made of a transparent protection plug customisable tag holder using the LSE set (available as accessory). **The customisation lets you identify the valve on the system** according to the specific needs
- **Drilling pattern with oval slots** that allow coupling to flanges according to numerous international standards
- **Interchangeable liner** with the dual function of forming a hydraulic seal and isolating the body from the fluid.
- One-piece top flange with PVC-U rack. Drilling according to standard ISO 5211 for direct drive: B \bar{E} DN 40 Γ· 65: F05B \bar{E} DN 80 Γ· 150: F07B \bar{E} DN 200: F10

- Disk in PVC-U with through shaft
- **Zinc plated square section steel stem completely isolated from the fluid** complying with standard ISO 5211: DN 40 Γ· 65: 11 mm DN 80 Γ· 100: 14 mm DN 125 Γ· 150: 17 mm DN 200: 22 mm
- Can also be installed as a bottom discharge valve or tank dump valve
- **Valve material compatibility** (PVC-U) with water conveyance, drinking water and other food substances according to **current regulations**
- Possibility of directly installing a gearbox or pneumatic and/or electric actuators with a standard drilling pattern according to standard ISO 5211 F05, F07, F10