


Power Quick/CP

The valve can be equipped with pneumatic actuators, using the PP-GR module reproducing the drilling pattern foreseen by ISO 5211



Κωδικός Προϊόντος	tooltiplmage	d	DN	B[5:2]	Q	T	ρ x j	P X J	ISO	Square	to be used with:
PQCP020	-	20	15	58	11	12	F03 x 5,5	F04 x 5,5	F03-04	11	VKD-TKD
PQCP025	-	25	20	69	11	12	*F03 x 5,5	F05 x 6,5	F03-05	11	VKD-TKD
PQCP025F04	-	25	20	-	-	-	F04	-	F04	11	VKD-TKD
PQCP032	-	32	25	74	11	12	*F03 x 5,5	F05 x 6,5	F03-05	11	VKD-TKD
PQCP032F04	-	32	25	-	-	-	F04	F05 x 6,5	F04	11	VKD-TKD
PQCP040	-	40	32	91	14	16	F05-07*	F07 x 8,5	F05-07	14	VKD-TKD
PQCP050	-	50	40	97	14	16	F05-07*	F07 x 8,5	F05-07	14	VKD-TKD
PQCP063	-	63	50	114	14	16	F05-07*	F07 x 8,5	F05-07	14	VKD-TKD

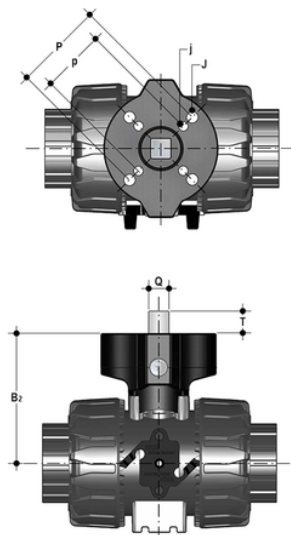

Power Quick/CP

- Upper part (PVC-U)
 - Bottom part (PVC-U)
 - Bolts (zinc plated steel)
 - Nuts (zinc plated steel)
 - Gasket (NBR)
 - Reinforcing ring (Stainless steel)
- The reinforcing bush are used to reinforce the pipe PE100 (SDR11) e PE-X, to along the lifetime of the pipeline and to reduce the collapse risk of the pipe in disadvantages conditions. They use is particularly suggested using PE-X pipes. The two tightening keys (d.16-63 and d.75-110) are important tools to install the **MAGNUM 3G** fittings