


C6.30

C-PVC Inductive Conductivity Transmitter with Temperature Sensor (Pt100) included



Κωδικός προϊόντος	tooltiplmage	Description	Operative Range	Connection	Installation
C6.30.01	-	Pt100 included	0-10 mS/cm	3 m	1 1/2" NPT male threaded
C6.30.02	-	Pt100 included	0-100 mS/cm	3 m	1 1/2" NPT male threaded
C6.30.03	-	Pt100 included	0-1000 mS/cm	3 m	1 1/2" NPT male threaded

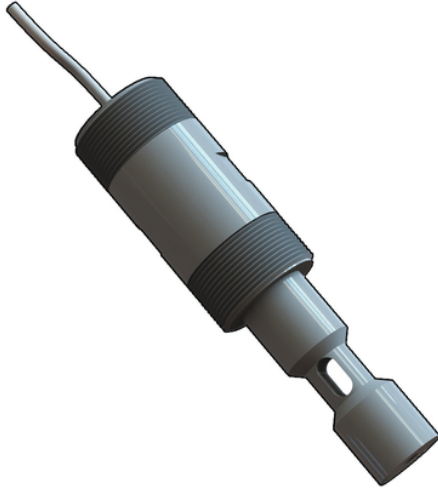

C6.30

- APPLICATIONS β' Water treatment β' Waste water treatment β' Cooling towers β' Scrubber systems β' Metal finishing Coating and corrosion fluid measurement MAIN FEATURES β' Corrosion & coating resistant β' Compact transmitter β' No calibration required β' Easy installation β' Pt100 sensor integrated β' Suitable for submersible installation