


F6.61.XX

Hot Tap Magmeter Flow Sensor



Κωδικός προϊόντος	tootiplmage	Version	Power supply	Lenght	Main Wetted Materials	Enclosure	Flow Rate Range	Weight (gr.)
F6.61.01	-	HOT TAP INSERTION INSTALLATION	12 - 24 VCC	615 mm	316L SS \$ PVDF \$ AISI 316L	IP65	Da 0,05 a 8 m/s*	6000

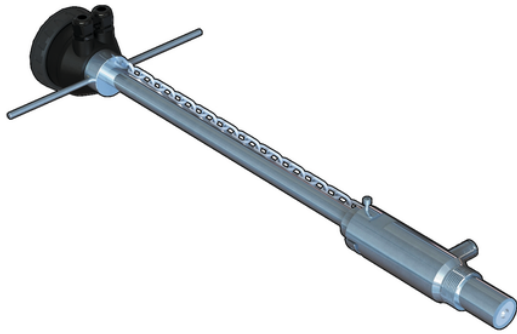

F6.61.XX

- APPLICATIONS β' Water distribution β' Leak Detection or Monitoring β' Raw water intake β' Water and waste water treatment β' Ground water remediation β' Irrigation MAIN FEATURES β' Adjustable sensor position β' Hot-Tap installation β' Operating parameters settable by PC interface β' Pressure intake β' Standard 1 BOβ BSP process connection β' No moving parts, no wear, maintenance free β' Flow Rate Range settable from 0.05 to 8 m/s (0.15 to 25 ft/s) β' Accurate measurement of dirty liquids β' 4-20 mA, frequency or volume pulse outputs β' Bi-directional flow measurement selectable