


FBS

Installation kits FBS for FRIALOC[®] PE shut-off valves with KlickFix[®] system.

To operate the FRIALOC PE shut-off valve from the surface box. Optimally matched, can be individually extended to the required covering height. With KlickFix coupler for easy installation. Made of galvanised steel or stainless steel.

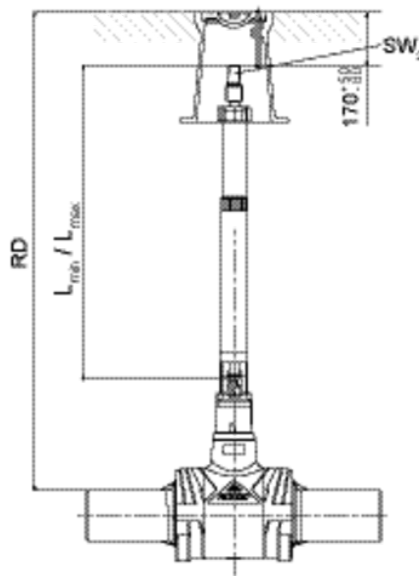

Κωδικός προϊόντος	RD in m	BX	PU	l _{min}	l _{max}	sw2	Weight kg
616308	0,75 - 1,0	1	42	397	571	30	2,500
616309	0,9 - 1,3	1	42	552	881	30	2,950
616310	1,2 - 1,8	1	42	817	1441	30	3,850
616318	1,5 - 2,3	1	42	1035	1847	30	4,400

Other lengths on request.

FBS

Installation kits FBS for FRIALOC[®] PE shut-off valves with KlickFix[®] system.

Area of application

Telescopic activation bar to operate the FRIALOC PE shut-off valve from the street cap.

Assembly instructions

Before fusion, the FRIALOC PE shut-off valve must be aligned corresponding to the planned actuation to guarantee a correct positioning of the FRIALEN installation kit (FBS).

Good reasons for the installation kit FBS for FRIALOC PE shut-off valves:

easy and safe installation thanks to KlickFix[®] system

protective pipe of polyethylene protects from intrusion of sand or soil

pull tight connection between FRIALOC and protective pipe: solid and dirt-proof

assembly without tools

self-supporting in all telescopic positions

safe from being pulled out

corrosion-resistant

telescopic installation kit can also be adjusted even once in place and filled

constructive harmonizing of the transferable torque onto the FRIALOC PE shut-off valve

Connexion pins made of stainless steel