


S12AV - 110V AC - true union 2-way solenoid valve

2 way solenoid valve with ASTM female union ends for solvent welding.

Function: Normally closed. Power supply: 110V AC

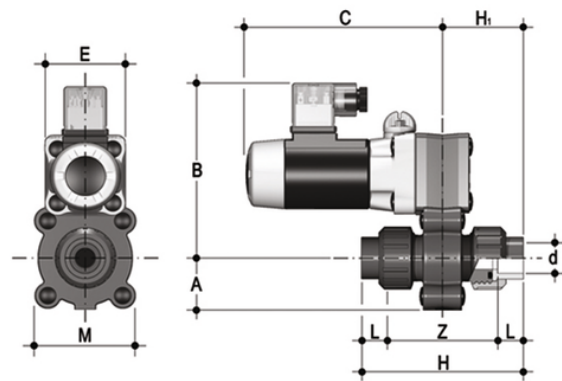

EPDM

| Reference | system | Category | family | series | d | DN | A | B | C | H | H ₁ | L | Z | E | M | g |
|----------------|-------------------|------------------------------|-----------------|-----------|------|----|----|-----|-----|----|----------------|----|----|----|----|-----|
| S12AV0414E110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 1/4" | 4 | 24 | 100 | 103 | 92 | 46 | 16 | 60 | 42 | 52 | 400 |
| S12AV0438E110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 3/8" | 4 | 24 | 100 | 103 | 98 | 49 | 19 | 60 | 42 | 52 | 400 |
| S12AV0614E110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 1/4" | 6 | 24 | 100 | 103 | 92 | 46 | 16 | 60 | 42 | 52 | 400 |
| S12AV0638E110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 3/8" | 6 | 24 | 100 | 103 | 98 | 49 | 19 | 60 | 42 | 52 | 400 |
| S12AV0814E110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 1/4" | 8 | 24 | 100 | 103 | 92 | 46 | 16 | 60 | 42 | 52 | 400 |
| S12AV0838E110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 3/8" | 8 | 24 | 100 | 103 | 98 | 49 | 19 | 60 | 42 | 52 | 400 |

S12AV - 110V AC - true union 2-way solenoid valve

| Reference | system | Category | family | series | d | DN | A | B | C | H | H ₁ | L | Z | E | M | g |
|----------------|-------------------|------------------------------|-----------------|-----------|------|----|----|-----|-----|----|----------------|----|----|----|----|-----|
| S12AV0414F110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 1/4" | 4 | 24 | 100 | 103 | 92 | 46 | 16 | 60 | 42 | 52 | 400 |
| S12AV0438F110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 3/8" | 4 | 24 | 100 | 103 | 98 | 49 | 19 | 60 | 42 | 52 | 400 |



S12AV - 110V AC - true union 2-way solenoid valve

| Reference | system | Category | family | series | d | DN | A | B | C | H | H ₁ | L | Z | E | M | g |
|----------------|-------------------|------------------------------|-----------------|-----------|------|----|----|-----|-----|----|----------------|----|----|----|----|-----|
| S12AV0614F110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 1/4" | 6 | 24 | 100 | 103 | 92 | 46 | 16 | 60 | 42 | 52 | 400 |
| S12AV0638F110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 3/8" | 6 | 24 | 100 | 103 | 98 | 49 | 19 | 60 | 42 | 52 | 400 |
| S12AV0814F110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 1/4" | 8 | 24 | 100 | 103 | 92 | 46 | 16 | 60 | 42 | 52 | 400 |
| S12AV0838F110A | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 3/8" | 8 | 24 | 100 | 103 | 98 | 49 | 19 | 60 | 42 | 52 | 400 |



S12AV - 110V AC - true union 2-way solenoid valve

- Installation flexibility and ease of maintenance: high-performance solenoid electric actuator with internal moving parts designed to exceed 5 million maintenance free operating cycles. Adjustable circular section coil with IP65 protection class.
 - DIN 43650 electrical connector supplied as standard: includes LED indicator light and rectifier (in the case of an AC coil).
 - Lever shutter in EPDM or FKM and lever in stainless steel.
 - Suitable for use with aggressive fluids: no metal component in contact with the fluid or the external environment; all the screws are covered by PE protection plugs.
 - Emergency override
-
- 2-Way PVC-U body
 - Installation flexibility and ease of maintenance: high-performance solenoid electric actuator designed to exceed 5 million maintenance-free operating cycles
 - Adjustable circular section coil with IP65 protection class.
 - Integrated override with the possibility of being installed in 3 different positions.
 - Lever shutter in EPDM or FKM and lever in stainless steel.
 - DIN 43650 electrical connector supplied as standard: includes LED indicator light and rectifier (in the case of an AC coil).