


S22IV - 24V AC - true union 2-way solenoid valve

2 way solenoid valve with female union ends for solvent welding.

Function: Normally closed. Power supply: 24V AC

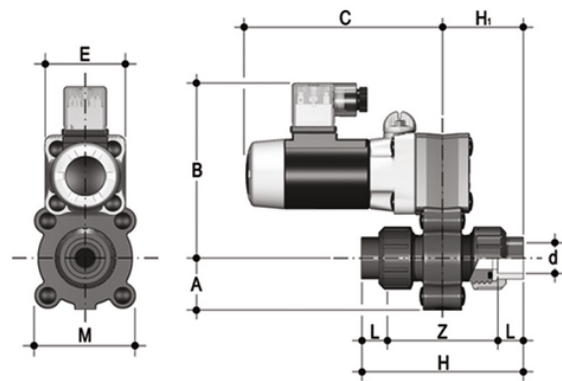

EPDM

| Reference | tooltiplmage | system | Category | family | series | d | DN | A | B | C | H | H ₁ | L | Z | E | M | g |
|----------------|--------------|-------------------|------------------------------|-----------------|-----------|----|----|----|-----|-----|-----|----------------|----|----|----|----|------|
| S22IV0816E024A | - | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 16 | 8 | 34 | 115 | 130 | 99 | 50 | 14 | 71 | 54 | 67 | 1000 |
| S22IV0820E024A | - | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 20 | 8 | 34 | 115 | 130 | 103 | 52 | 16 | 71 | 54 | 67 | 1000 |
| S22IV1016E024A | - | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 16 | 10 | 34 | 115 | 130 | 99 | 50 | 14 | 71 | 54 | 67 | 1000 |
| S22IV1020E024A | - | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 20 | 10 | 34 | 115 | 130 | 103 | 52 | 16 | 71 | 54 | 67 | 1000 |
| S22IV1516E024A | - | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 16 | 15 | 34 | 115 | 130 | 99 | 50 | 14 | 71 | 54 | 67 | 1000 |
| S22IV1520E024A | - | Automation system | Electrically actuated valves | Solenoid valves | S1 DN 4÷8 | 20 | 15 | 34 | 115 | 130 | 103 | 52 | 16 | 71 | 54 | 67 | 1000 |

S22IV - 24V AC - true union 2-way solenoid valve

| Reference | tooltiplmage | system | Category | family | series | d | DN | A | B | C | H | H ₁ | L | Z | E | M | g |
|----------------|--------------|-------------------|------------------------------|-----------------|------------|----|----|----|-----|-----|-----|----------------|----|----|----|----|------|
| S22IV0816F024A | - | Automation system | Electrically actuated valves | Solenoid valves | S2 DN 8÷15 | 16 | 8 | 34 | 115 | 130 | 99 | 50 | 14 | 71 | 54 | 67 | 1000 |
| S22IV0820F024A | - | Automation system | Electrically actuated valves | Solenoid valves | S2 DN 8÷15 | 20 | 8 | 34 | 115 | 130 | 103 | 52 | 16 | 71 | 54 | 67 | 1000 |



S22IV - 24V AC - true union 2-way solenoid valve

| Reference | tooltipImage | system | Category | family | series | d | DN | A | B | C | H | H ₁ | L | Z | E | M | g |
|----------------|--------------|-------------------|------------------------------|-----------------|------------|----|----|----|-----|-----|-----|----------------|----|----|----|----|------|
| S22IV1016F024A | - | Automation system | Electrically actuated valves | Solenoid valves | S2 DN 8÷15 | 16 | 10 | 34 | 115 | 130 | 99 | 50 | 14 | 71 | 54 | 67 | 1000 |
| S22IV1020F024A | - | Automation system | Electrically actuated valves | Solenoid valves | S2 DN 8÷15 | 20 | 10 | 34 | 115 | 130 | 103 | 52 | 16 | 71 | 54 | 67 | 1000 |
| S22IV1516F024A | - | Automation system | Electrically actuated valves | Solenoid valves | S2 DN 8÷15 | 16 | 15 | 34 | 115 | 130 | 99 | 50 | 14 | 71 | 54 | 67 | 1000 |
| S22IV1520F024A | - | Automation system | Electrically actuated valves | Solenoid valves | S2 DN 8÷15 | 20 | 15 | 34 | 115 | 130 | 103 | 52 | 16 | 71 | 54 | 67 | 1000 |

S22IV - 24V AC - true union 2-way solenoid valve

- Installation flexibility and ease of maintenance: high-performance solenoid electric actuator with internal moving parts designed to exceed 5 million maintenance free operating cycles. Adjustable circular section coil with IP65 protection class.
 - DIN 43650 electrical connector supplied as standard: includes LED indicator light and rectifier (in the case of an AC coil).
 - Lever shutter in EPDM or FKM and lever in stainless steel.
 - Suitable for use with aggressive fluids: no metal component in contact with the fluid or the external environment; all the screws are covered by PE protection plugs.
 - Emergency override
-
- 2-Way PVC-U body
 - Installation flexibility and ease of maintenance: high-performance solenoid electric actuator designed to exceed 5 million maintenance-free operating cycles
 - Adjustable circular section coil with IP65 protection class.
 - Integrated override with the possibility of being installed in 3 different positions.
 - Lever shutter in EPDM or FKM and lever in stainless steel.
 - DIN 43650 electrical connector supplied as standard: includes LED indicator light and rectifier (in the case of an AC coil).