

# Automatic Grease Interceptor "Self Clean"

One-piece polyethylene Automatic Grease Interceptor, size 2-10 l./sec., with screw-on cover both for central inspection and removing grease and floating material, and for removing sand and inert matter.

Cleaning frequency: 4 weeks.

Featuring PVC, PE or PP inlet pipe section; PVC, PE or PP treated water outlet pipe section with external neoprene seal, outlet tee fitting and inspection cap.

For application on kitchen and canteen drain lines.


ISEA Grease Trap Family is produced with recyclable material.

**Material:** PE with PVC, PE or PP inlet & outlet pipe section

**Size:** 2 – 10 L/sec.

**Capacity:** 1,500 – 6,000 L

**Compliance with standard:** CE - UNI EN 1825

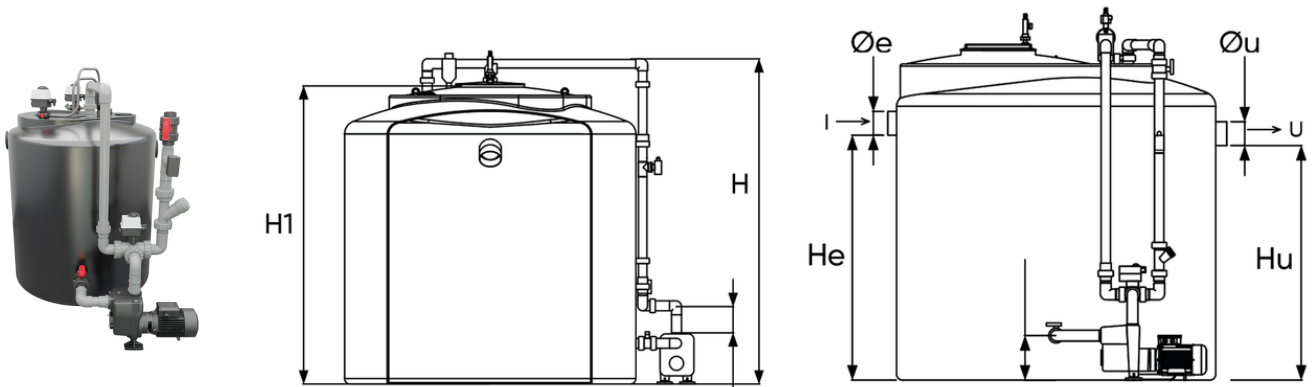

Reference	tootiplmage	D (cm)	Height H (cm)	Height H1 (cm)	HE (cm)	HU (cm)	ØE e ØU (mm)	Capacity (litres)	Item	Users (E.I.)	Flow Rate (l/s)
ISDA1LU	-	120	157	140	115	108	100	1.500	LUXURY	0-50	2
ISDA2LU	-	120	212	195	173	166	125	2.000	LUXURY	50 - 200	3
ISDA3LU	-	147	216	200	165	158	125	3.000	LUXURY	200-500	5
ISDA4LU	-	147	260	245	210	203	160	4.000	LUXURY	500-1.000	7
ISDA6LU	-	215	140	220	165	158	160	6.000	LUXURY	1.000-2.000	10
ISDA1PL	-	120	157	140	115	108	100	1.500	PLUS	0-50	2
ISDA2PL	-	120	212	195	173	166	125	2.000	PLUS	50-200	3
ISDA3PL	-	147	216	200	165	158	125	3.000	PLUS	200-500	5
ISDA4PL	-	147	260	245	210	203	160	4.000	PLUS	500-1.000	7
ISDA6PL	-	215	140	220	165	158	160	6.000	PLUS	1.000-2.000	10
ISDA1PR	-	120	157	140	115	108	100	1.500	PRO	0-50	2
ISDA2PR	-	120	212	195	173	166	125	2.000	PRO	50-200	3
ISDA3PR	-	147	216	200	165	158	125	3.000	PRO	200-500	5

# Automatic Grease Interceptor "Self Clean"

Reference	tooltiplimage	D (cm)	Height H (cm)	Height H1 (cm)	HE (cm)	HU (cm)	ØE e ØU (mm)	Capacity (litres)	Item	Users (E.I.)	Flow Rate (l/s)
ISDA4PR	-	147	260	245	210	203	160	4.000	PRO	500-1.000	7
ISDA6PR	-	215	140	220	165	158	160	6.000	PRO	1.000-2.000	10
ISDA1BA	-	120	157	140	115	108	100	1.500	BASE	0-50	2
ISDA2BA	-	120	212	195	173	166	125	2.000	BASE	50-200	3
ISDA3BA	-	147	216	200	165	158	125	3.000	BASE	200-500	5
ISDA4BA	-	147	260	245	210	203	160	4.000	BASE	500-1.000	7
ISDA6BA	-	215	140	220	165	158	160	6.000	BASE	1.000-2.000	10