


DBME - Adaptor

Adaptor for butt welding , BSP (Rp) threaded female end, SDR 11 - S5.



Reference	tooltiplmage	Other description	system	Category	family	series	d	R _p	l	l ₁	g
DBME11020012	-	* resale products ** Reduced adaptor, with metal ring reinforcement on female threaded end. Reduced PN.	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Long-spigot-for-butt-welding-and-electrofusion	*20	1/2"	65	41	16
DBME11025012**	-	* resale products ** Reduced adaptor, with metal ring reinforcement on female threaded end. Reduced PN.	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Long-spigot-for-butt-welding-and-electrofusion	25	1/2"	37	16	16
DBME11025034	-	* resale products ** Reduced adaptor, with metal ring reinforcement on female threaded end. Reduced PN.	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Long-spigot-for-butt-welding-and-electrofusion	*25	3/4"	63	41	22
DBME11032100	-	* resale products ** Reduced adaptor, with metal ring reinforcement on female threaded end. Reduced PN.	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Long-spigot-for-butt-welding-and-electrofusion	*32	1"	71	44	41
DBME11040114	-	* resale products ** Reduced adaptor, with metal ring reinforcement on female threaded end. Reduced PN.	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Long-spigot-for-butt-welding-and-electrofusion	*40	1" 1/4	79	49	62
DBME11050112	-	* resale products ** Reduced adaptor, with metal ring reinforcement on female threaded end. Reduced PN.	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Long-spigot-for-butt-welding-and-electrofusion	*50	1" 1/2	88	55	82
DBME11063200	-	* resale products ** Reduced adaptor, with metal ring	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Long-spigot-for-butt-welding-and-electrofusion	*63	2"	97	63	143

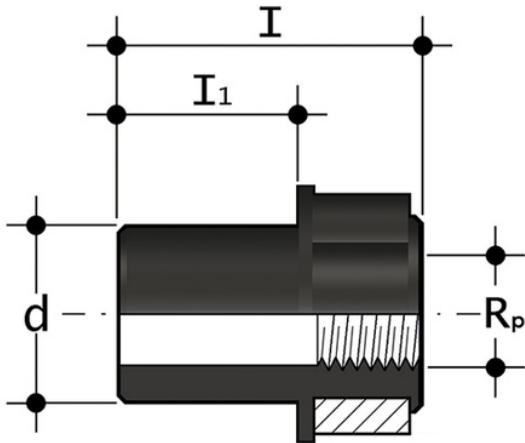

DBME - Adaptor

Reference	tooltiplmage	Other description	system	Category	family	series	d	R _p	l	l ₁	g
		reinforcement on female threaded end. Reduced PN.									



DBME – Adaptor

- Size range: d 20 ÷ 63 (mm); R 1/2" ÷ 2"
- Nominal pressure: SDR 11 (PN16) with water at 20 °C
- Temperature range: -40 °C ÷ 60 °C
- Coupling standards – Reference standards:
 - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
 - Thread: ISO 228-1, DIN 2999
 - Construction criteria: EN ISO 15494
 - Test methods and requirements: EN ISO 15494
 - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD