


Pressure pipe VDA PN20

VDA® Pressure Pipe, Blue RAL 5010, Length 6m, Connection FORSHEDA 601 POWER-LOCK®.



Reference	tooltiplmage	product.detail.attribute.textBelowTableText	system	Category	family	series	D (mm)	S (mm)	Lb (mm)
PIVDAPN20050F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	*50	3.9	110
PIVDAPN20063F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	63	4.7	110
PIVDAPN20075F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	75	5.6	120
PIVDAPN20090F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	**90	5.9	130
PIVDAPN20110F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	110	6.0	130
PIVDAPN20125F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	**125	6.8	150
PIVDAPN16140F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	140	7.6	160
PIVDAPN16160F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	160	7.0	165

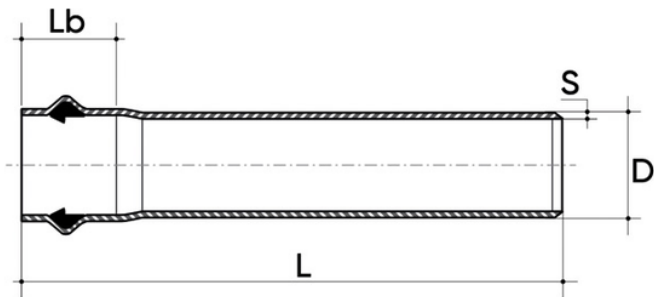

Pressure pipe VDA PN20

Reference	tooltipImage	product.detail.attribute.textBelowTableText	system	Category	family	series	D (mm)	S (mm)	Lb (mm)
PIVDAPN20200F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	200	11.5	180
PIVDAPN20225F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	**225	12.2	200
PIVDAPN20250F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	**250	13.6	210
PIVDAPN20280F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	**280	15.2	210
PIVDAPN20315F6L	-	* Gluing only ** On request	VDA system	Pipes	PVC-A Pipe BS-PAS-27:1999	PN20 pipe	315	17.1	230



Pressure pipe VDA PN20

- **Size range:** d 50 ÷ 500 (mm)
- **Nominal pressure:**
 - PN 8 with water at 20° C
 - PN 10 with water at 20° C
 - PN 12,5 with water at 20° C
 - PN 16 with water at 20° C
 - PN 20 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards:** FORSHEDA JOINT, gluing on request
- **Reference standards:**
 - KQ KIWA QUALITY KIP-105133- BSPAS27
 - D.M. No.174/2004-potability
 - UNI EN 1622- odour and flavour threshold
- **Pipe material:** PVC-A colour BLUE RAL 5010