


POWER-LOCK VDA® PN10 - 22° bend

VDA® pressure POWER-LOCK bend, Blu Ral 5010, 22 DEGREES, connection FORSHEDA 601 POWER-LOCK®.



Reference	Other description	system	Category	family	series	D (mm)	S (mm)	Lb (mm)	Qty x pallet
PBVDAPN10063F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	63	2.1	110	80
PBVDAPN10075F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	75	2.3	120	80
PBVDAPN10090F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	90	2.6	130	80
PBVDAPN10110F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	110	3.1	130	60
PBVDAPN10125F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	125	3.5	150	45
PBVDAPN10140F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	140	3.9	160	35
PBVDAPN10160F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	160	4.5	165	25
PBVDAPN10200F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	200	5.6	180	*
PBVDAPN10225F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	225	6.3	200	*
PBVDAPN10250F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	250	7.0	210	*
PBVDAPN10280F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	280	7.8	210	*

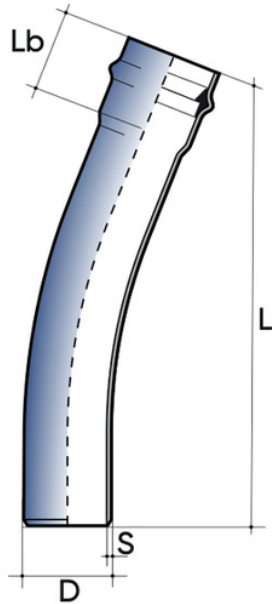

POWER-LOCK VDA® PN10 - 22° bend

Reference	Other description	system	Category	family	series	D (mm)	S (mm)	Lb (mm)	Qty x pallet
PBVDAPN10315F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	315	8.8	230	*
PBVDAPN10355F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	355	9.9	250	*
PBVDAPN10400F2L	* Quantity to be defined	VDA system	Pipes	PVC-A Power-Lock Bends	PN10 Power-Lock bends	400	11.2	250	*



POWER-LOCK VDA® PN10 - 22° bend

- **Size range:** d 63 ÷ 400 (mm); Degrees: 22°
- **Nominal pressure:** PN10
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards:** FORSHEDA JOINT, gluing on request
- **Reference standards:** Curves produced from certified pipes:
 - KQ KIWA QUALITY KIP-105133- BSPAS27
 - D.M. No.174/2004-potability
 - UNIEN 1622- smell and taste threshold
- **Bend material:** PVC-A colour BLUE RAL 5010