

MR NXT SDR 11


Reducer, SDR 11

Reducer MR NXT SDR 11

- Gas, water and H₂
- Working pressure: MOP (gas) 10 bar, PFA (water) 16 bar
- Material: PE 100 RC
- Safety technology
- Large insertion depth for good pipe routing (no holding devices required)
- DVGW test mark: DV-8601AU2248, DV-8606AU2249, DV-8611AU2250 and DW-8610CN04200

Note:

The availability of the articles must be requested individually for specific markets or countries, as these countries will be switched one by one in 2025/2026.

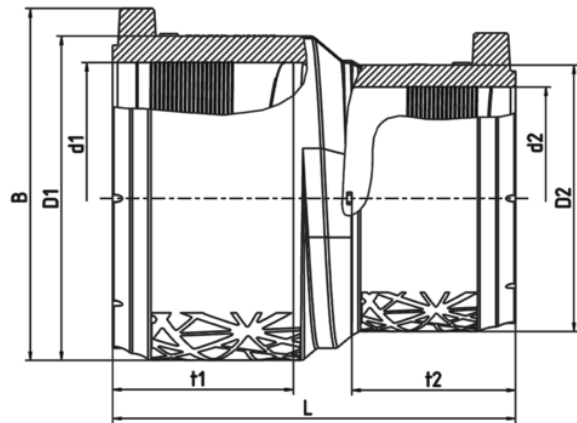

PE 100 SDR 11

Maximum permissible working pressure 16 bar (water) / 10 bar (gas)



Reference	d ₁	d ₂	PU	L	t ₁	t ₂	B	d ₂	Weight kg
617247	32	20	2560	124	43	40	59	29	0,056
617248	32	25	2240	129	43	40	59	33	0,061
617249	40	32	1600	128	48	43	67,5	40,5	0,079
617250	50	32	1024	129	53	43	78,5	40,5	0,102
617251	50	40	800	127	53	48	78,5	49,5	0,110
617252	63	32	576	134,5	52,5	43	92,5	40,5	0,144
617253	63	40	512	135,5	52,5	48	92,5	49,5	0,152
617254	63	50	512	135,5	52,5	54	92,5	61,5	0,165
617255	90	63	270	153,5	71	58,5	122,5	77	0,369

MR NXT SDR 11

Reducer, SDR 11

Reference	d ₁	d ₂	PU	L	t ₁	t ₂	B	d2	Weight kg
617256	90	75	270	159	71	64	122,5	91	0,404
617257	110	63	180	161,5	74	59	144	77	0,525
617258	110	90	144	165	74	67	144	109	0,582
617259	125	90	144	175	80	70	160,5	132,5	0,743
617260	125	110	128.0	171	80	67	160,5	109	0,810
617261	160	110	64	194	95	70	199	132,5	1,360

MR NXT SDR 11

Reducer, SDR 11

Areas of Application

The FRIALEN Electrofusion Reducer MR NXT SDR11 is applied for immediate pipe reduction within the pipe system.

Assembly Instructions

The pipe ends are joined to the FRIALEN Electrofusion Reducers MR NXT SDR11 by electrofusion welding – tight and longitudinally force-fit.

The pipe ends are prepared according to the general installation instructions (see "Assembly Instructions" for "FRIALEN-Safety Fittings").

This involves removing the oxide layer of the pipe end and cleaning of pipe surface.

For removal of the oxide layer, FWSG scraper tools are available which facilitate a uniform swarf removal and a reproducible quality of the fusion area preparation.

Good reasons for using the FRIALEN-Reducer MR NXT SDR11:

- Large coupler depth for ease of pipe guiding (no holding clamps required)
- Maximized fusion zones
- Safety Fitting Design
- 25% lower CO₂-Footprint
- Cold zones at the front side and in the middle of the coupler
- Exposed heating coil for direct heat transmission in the fusion zone
- Lowest energy consumption and variable voltage
- Optimised tolerances for "perfect fit" for easy installation
- Touch proof electric contacts
- Fusion indicators for visual fusion control
- Angle and insertion depth markings for quick and safe installation
- Durable batch marking
- Individually wrapped for dirt protection
- 2D barcode for tracing back the fitting (Traceability-Coding).