

100 modular channel LOW

Linear evacuation by superficial drainage channels with grills.


These channels can be placed in flat open areas without digging limitations. To use as rain water drainage in garages, terraces and balconies, multi-storeyed car parks in all cases of low concrete slab.

Material: PVC.

Features:

- fixing brackets (preset for nails or screw fastening)
- side slots for better anchorage to concrete
- modular couplings by pins
- preset for cover screw fastening
- vertical outlet \varnothing 63 (easy perforation)
- end cap (outlet diameter 50)
- possibility to glue the components to ensure water tightness.

N.B. Use solvent cement for PVC to weld the channels (Reference COLLA00 - COLLA25 - COLLA12).

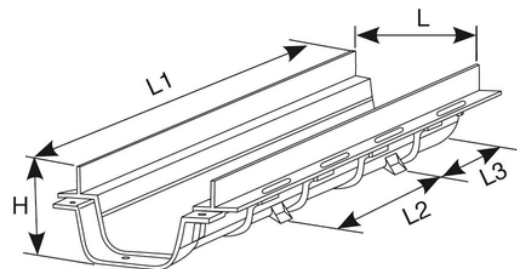

Reference	tooltiplmage	RAL	H (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Material
E1810B4	-	7035	50	100	500	200	150	PVC