

200 Grill Light traffic

Linear evacuation by superficial drainage channels with grills. These channels can be placed in flat open areas without digging limitations. Use on light duty traffic areas, such as garage fronts, private driveways, yards, pedestrian areas.

Material: PVC

Marking: CE



Regulation: EN124 A15 Load class.

Use: light duty traffic draining grate for 200 channels.

Characteristics:

- antiskid as the knurled surface and the chamfered draining profile avoid water stagnation and ice
- provided with coupling pins
- provided with a central stiffening rib.

IMPORTANT: in the planning stage, the grate breaking load must be scaled down by using a correct safety factor.

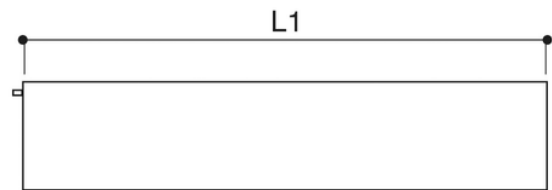

Reference	tooltiplImage	RAL	H (mm)	L (mm)	L1 (mm)	kN	l/s	Material
0219004	-	7035	20	200	500	61	2,8	PVC