

PP Vertical outlet floor drain without trap

Especially designed for public premises, balconies, industrial kitchens, public lavatories and in all cases a trapping action is required.

Use: to collect rain and waste water.


Advantages:

- round plate and flange to lock the insulating membrane
- 360° adjustable riser
- easy inspection.

All products can be classified in load class K3 in accordance with regulation EN 1253 (resistance >300 kg). All tests have been carried out at Aliaxis laboratories.

Supplied with protection to permit easy installation.

Tested by MPA.

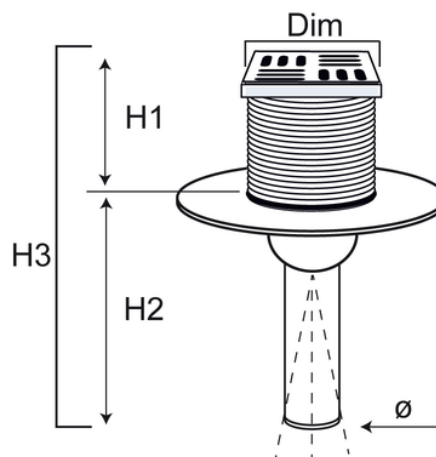

| Reference | tooltiplmage | RAL | H1 (mm) | Dim (mm) | Ø1 (mm) | H1 mm Min | h3MmMin | h3MmMax | l/s | Material | Grill |
|-----------|--------------|------|---------|----------|---------|-----------|---------|---------|-----|----------|-------|
| E7810AI | - | 7035 | 100 | 100 | 50 | 165 | 179 | 254 | 1,9 | PP | Inox |
| E7810PP | - | 7035 | 100 | 100 | 50 | 165 | 179 | 254 | 2,3 | PP | PP |
| E7815AI | - | 7035 | 100 | 150 | 50 | 165 | 179 | 254 | 2,6 | PP | Inox |