

PP Horizontal outlet floor drain without trap

Especially designed for public premises, balconies, industrial kitchens, public lavatories and in all cases a trapping action is required.

Use: to collect rain and waste water.


Advantages:

- very low casing
- round plate and flange to lock the insulating membrane
- 360° adjustable riser
- easy inspection.

All products can be classified in load class K3 in accordance with regulation EN 1253 (resistance >300 kg). All tests have been carried out at Aliaxis laboratories.

Supplied with protection to permit easy installation.

Tested by MPA.

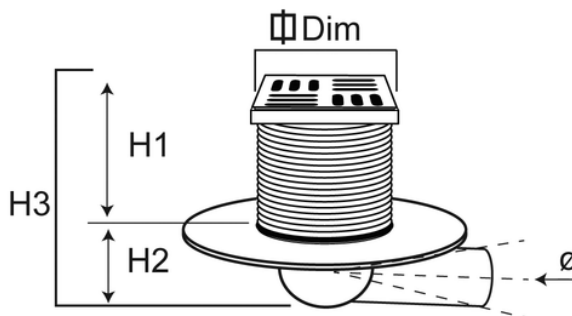

Reference	tootiplmage	RAL	H1 (mm)	Ø (mm)	Dim (mm)	H1 mm Min	h3MmMin	h3MmMax	l/s	Material	Grill
E7910AI	-	7035	100	50	100	95	128	183	1,4	PP	Inox
E7910PP	-	7035	100	50	100	95	128	183	1,7	PP	PP
E7915AI	-	7035	100	50	150	95	128	183	1,9	PP	Inox
E7915PP	-	7035	100	50	150	95	128	183	1,8	PP	PP