


Reduced multibranch 45° M/F 4 lateral inlets

- EN 1329 Solvent Welded PVC-U Fittings
- B s2 d0 Fire Reaction Euroclass
- Color: RAL 7037 Grey

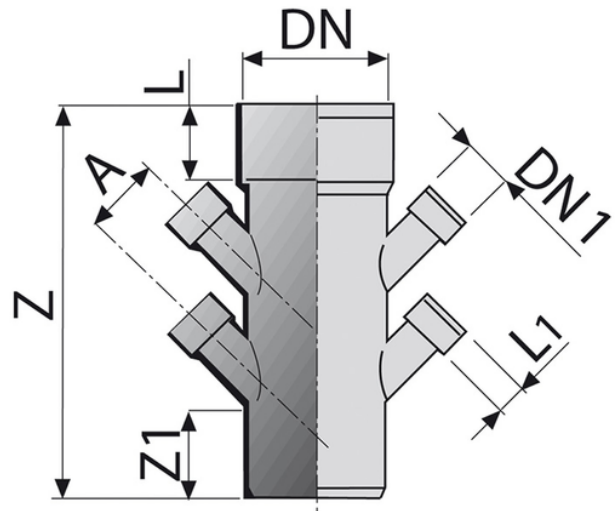

Reference	tooltiplmage	A (mm)	DN1 (mm)	Z (mm)	Z1 (mm)	L (mm)	L1 (mm)	DN (mm)	Version
0415502	-	55	40	273	65	57	27	100	upon request