


# AAV – primary ventilation (universal, diameter range: Ø75 ÷ Ø114)

EN 12380

Airflow rate: 14 l/s.

Air tightness tested at: 10 Kpa.

Temperature range: da 0°C a 60°C. Effectiveness at low temperature (below zero): NPD

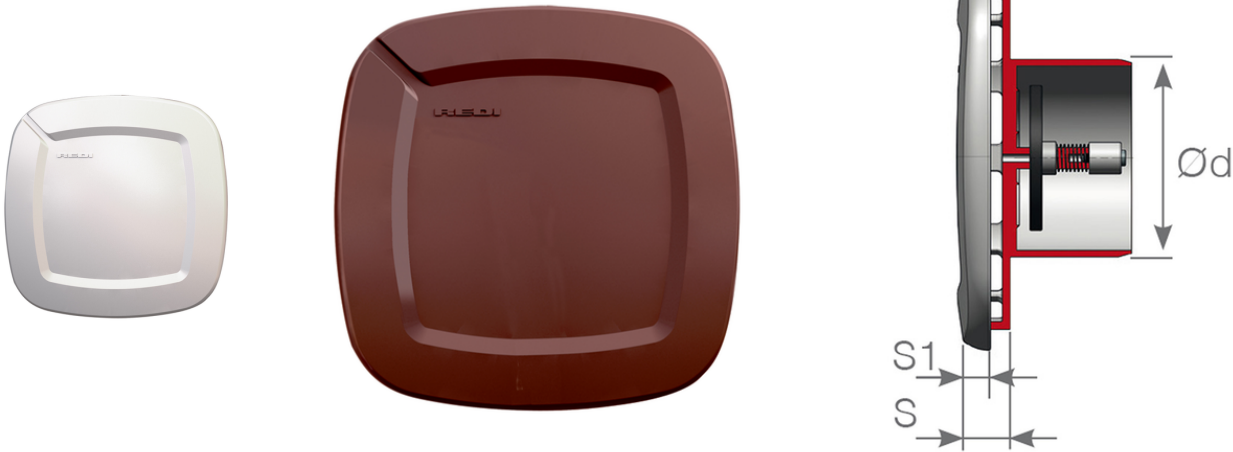

Reference	tooltiplmage	Colour	S (mm)	S1 (mm)	Dim (mm)	Ød (mm)
169000W	-	White	20	12,8	146,6 x 146,6	75
1690007	-	Dark brown	20	12,8	146,6 x 146,7	75