


POLI, activated sludge system

Activated Sludge Treatment System, consisting of 2 compartments: aeration compartment with air compressor fine bubble diffuser and settling chamber with air-lift system.

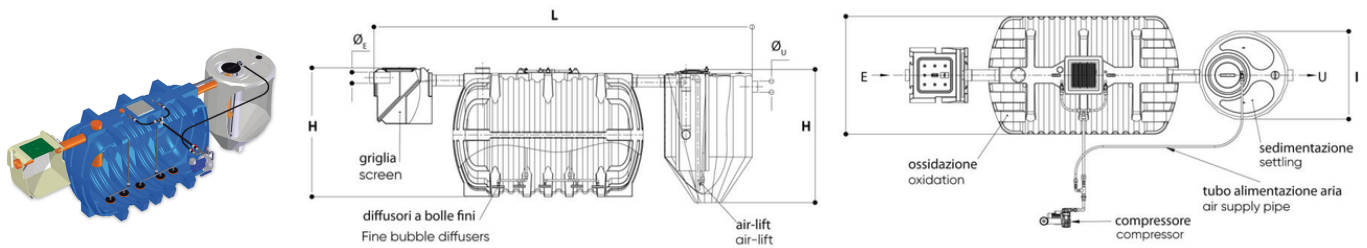

Reference	tooltiplmage	Height H (cm)	V ox (m ³)	V sett (m ³)	ØE e ØU (mm)	Power (Kw)	I (cm)	L (cm)	Item	Users (E.I.)
IS09022	-	212	6	2,5	160	0,7 (kW)	186	610	A.E. 50 (220V)	50
IS90221	-	212	6	2,5	160	0,7 (kW)	186	610	A.E. 50 (380V)	50
IS09032	-	240	8	4,0	160	1,1 (kW)	196	700	A.E. 75 (380V)	75
IS09023	-	240	10	4,0	200	1,5 (kW)	214	710	A.E. 100 (380V)	100
IS09024	-	240	16	6,5	200	2,2 (kW)	450	850	A.E. 150 (380V)	150
IS09025	-	240	20	8,0	200	2,2 (kW)	480	870	A.E. 200 (380V)	200