


# POLIMAXI, activated sludge system

Activated Sludge Treatment System, consisting of 2 compartments: aeration compartment with air compressor fine bubble diffuser and settling chamber with air-lift system. Compliance with standard: EN 12255-6

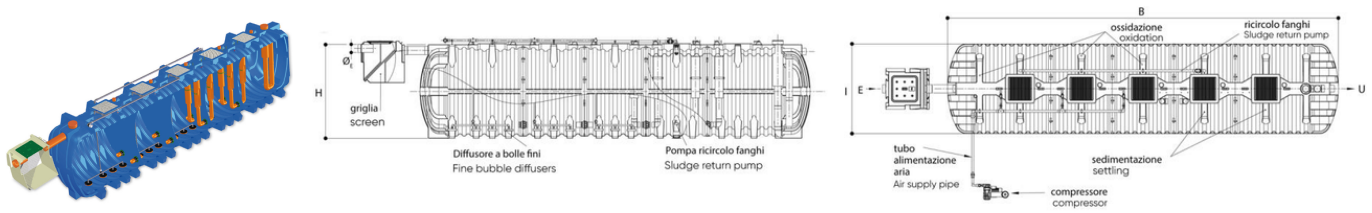

Reference	tooltiplmage	Height H (cm)	V ox (m <sup>3</sup> )	V sett (m <sup>3</sup> )	ØE e ØU (mm)	Power (Kw)	I (cm)	L (cm)	Item	Users (E.I.)
ISO9026	-	228	13	8	160	1,5 (kW)	214	646	A.E. 130 (380V)	130
ISO9027	-	228	18	8	160	2,2 (kW)	214	798	A.E. 160 (380V)	160
ISO9028	-	228	23	8	200	2,2 (kW)	214	950	A.E. 210 (380V)	210
ISO9029	-	228	23	13	200	3 (kW)	214	1102	A.E. 250 (380V)	250
ISO9030	-	228	28	13	200	3,0 (kW)	214	1254	A.E. 300 (380V)	300