


OTTO-PE, oil and hydrocarbon separator (Class I)

Polyethylene oil and hydrocarbon separator for runoff from forecourts, garages and machine shops.

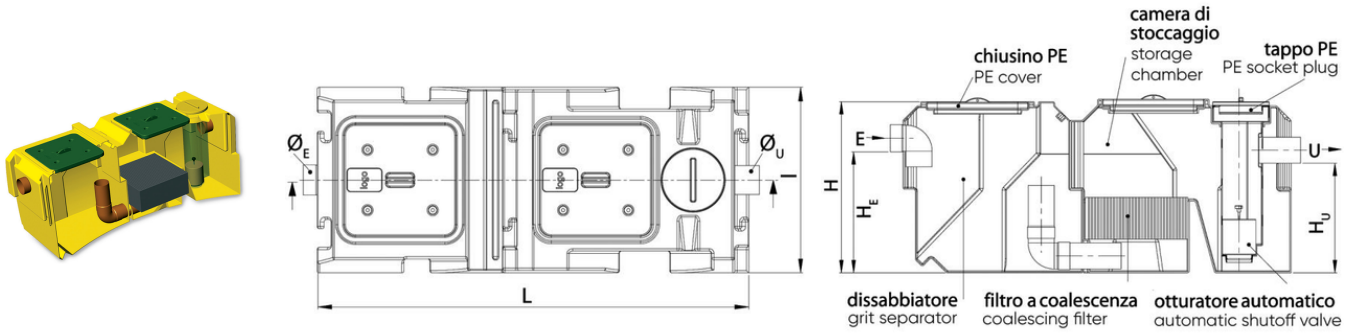

Reference	tooltiplmage	Height H (cm)	HE (cm)	HU (cm)	ØE e ØU (mm)	Total Volume (l)	l (cm)	L (cm)	Item	Flow Rate (l/s)
ISO0880	-	82,5	58	53	125	743	80	185	OTTO-PE 015	1,5 (N.S.)
ISO0881	-	82,5	58	53	125	890	80	210	OTTO-PE 030	3 (N.S.)
ISO0882	-	102,5	77	72	140	1.488	100	218	OTTO-PE 045	4,5 (N.S.)
ISO0883	-	102,5	77	72	140	1.590	100	233	OTTO-PE 060	6 (N.S.)