


# PRATICA ROTO type 250-500, lift station

One-piece polyethylene Lift Station for wastewater generated by small domestic facilities.

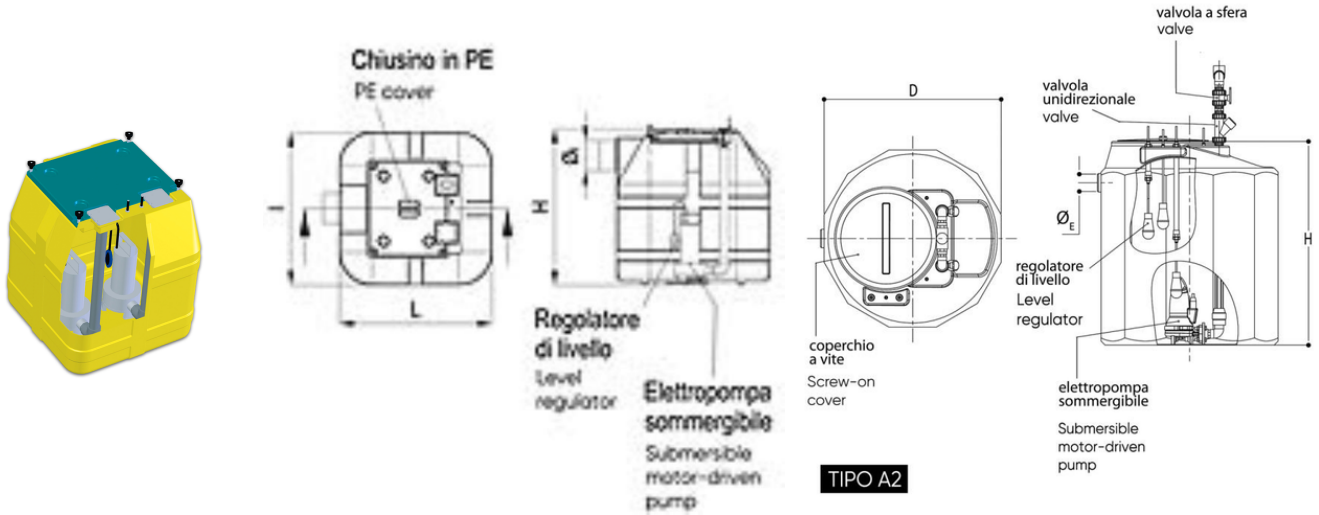

Reference	tootiplmage	Height H (cm)	ØE (mm)	Electrical Power 1 pump (Kw)	l x L (cm)	Capacity (litres)	Voltage (V)	Flow rate Q (m <sup>3</sup> /h)	Pump delivery	Item	Users (E.I.)	prevalenceHM
ISO4320	-	75	100	1,4	66x66	250	220	0-7	1½	Tipo 250 R1	5	2-20
ISO4321	-	75	100	1,4	66x66	250	220	0-14	1½	Tipo 250 R2	10	2-20
ISO4322	-	85	100	1,4	86x86	500	220	0-7	1½	Tipo 500 R1	15	2-20
ISO4323	-	85	100	1,4	86x86	500	220	0-14	1½	Tipo 500 R2	20	2-20