


PRATICA PUBLIC, lift station

One-piece polyethylene Lift Station with discharge connections for public sewers.

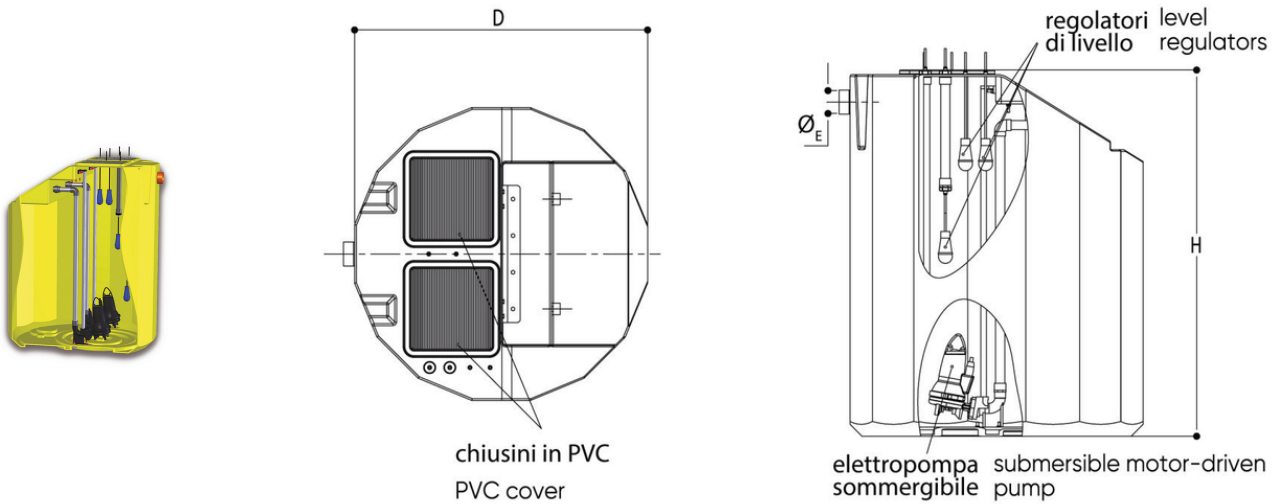

Reference	tooltiplmage	D (cm)	Height H (cm)	ØE (mm)	Electrical Power 1 pump (Kw)	Capacity (litres)	Voltage (V)	Flow rate Q (m ³ /h)	Pump delivery	Item	prevalenceHM
ISO4600	-	160	200	200	1,1	3.000	380	0 - 42	2	3000 B2	2 - 15
ISO4601	-	160	200	200	1,1	3.000	380	0 - 36	2	3000 E2	2 - 11
ISO4602	-	160	200	200	2,6	3.000	380	0 - 12,5	1½	3000 R2	4 - 21
ISO4603	-	160	240	200	1,5	4.000	380	0 - 48	2	4000 B2	3 - 18
ISO4604	-	160	240	200	1,5	4.000	380	0 - 42	2	4000 E2	2 - 13
ISO4605	-	160	240	200	2,6	4.000	380	0 - 12,5	1½	4000 R2	4 - 21
ISO4606	-	160	280	200	2,2	5.000	380	0 - 54	2	5000 B2	5 - 20
ISO4607	-	160	280	200	2,2	5.000	380	0 - 48	2	5000 E2	3 - 17
ISO4608	-	160	280	200	2,6	5.000	380	0 - 12,5	1½	5000 R2	4 - 21