


Expansion socket with anchor point

1 sealing ring

The expansion sockets can absorb length changes of pipes with a max. length of 6 m. A temperature difference of 10°C will result in expansion or contraction of 8 mm. The insertion depths at ambient temperature of 0°C and 20°C are indicated on the sockets.

Expansion sockets d75-160 mm have an intergrated anchor point, that is able to incorporate extension of the 5 meter down pipe of the Akasison system.

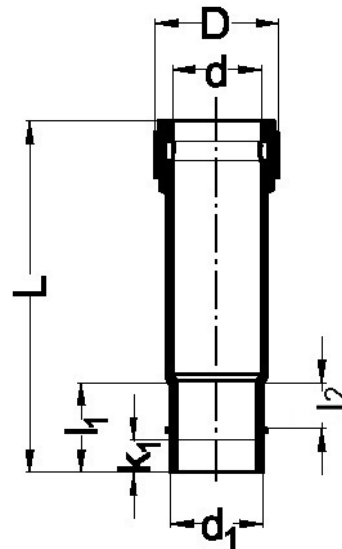

Reference	Name	tooltiplmage	Kg	l1	L	d	d1	D	Type	k1
40 04 20	Expansion socket with anchor point	-	0,088	135	172	41	40	58	B	-
40 05 20	Expansion socket with anchor point	-	0,096	135	172	51	50	68	B	-
40 06 20	Expansion socket with anchor point	-	0,116	135	155	64	63	78	B	-
40 20 20	Expansion socket with anchor point	-	1,720	245	310	202	200	230	B	-
40 25 20	Expansion socket with anchor point	-	2,900	265	330	253	250	300	B	-
40 31 20	Expansion socket with anchor point	-	5,100	290	360	319	315	370	B	-
40 56 20	Expansion socket with anchor point	-	0,105	135	172	57	56	74	B	-
42 07 20	Expansion socket with anchor point	-	0,179	75	256	76	75	100	A	35
42 09 20	Expansion socket with anchor point	-	0,303	75	256	91	90	116	A	35
42 11 20	Expansion socket with anchor point	-	0,339	75	256	112	110	137	A	35
42 12 20	Expansion socket with anchor point	-	0,430	75	256	127	125	153	A	35
42 16 20	Expansion socket with anchor point	-	0,790	75	265	162	160	189	A	35