


# S-806

## INEO 80 PLUS. Concealed cistern 1.120 mm

INEO 80 PLUS. Concealed cistern height 1185 mm, depth 95 mm, width 665 mm. For light walls or solid walls with light frontal plates. 6 anchor points. Completely pre-assembled. Support included. Height adjustment from 0-200 mm at ground level/finished floor. For walls from 95 till 120 mm thickness. Includes insulation against condensation. Double flush (6-4.5 or 3-2 liters). Adjusted from factory 6-3 liters. For operating plates with flexible cables of fast connexion. Filling valve with sound level Class I (DIN-EN 14055, KIWA). 1/2" angle valve. Includes evacuation elbow diam.90 mm with plug for tile work. Includes 2 screws M12 for WC suspended support (distance between screws 180 mm). For small sized operating plates - not included. Screws for fastening the frame to the wall are included.

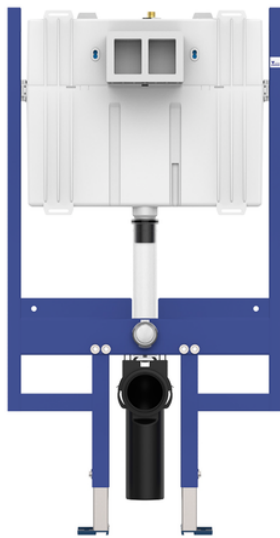

Reference	tootiplmage	Box units	measurement
023241	-	1	1.120 x 635 x 95 mm