


Branch 45° M/F

Push-Fit PVC-U Pipe and Fittings
 13 dB - 2 l/s Acoustic Performance
 B s1 d0 Fire Reaction Euroclass

Thermoplastic mineral-reinforced material PVC-U
 Ring jointed sockets fitted with certified elastomeric liprings
 Color: RAL 9005 - Black

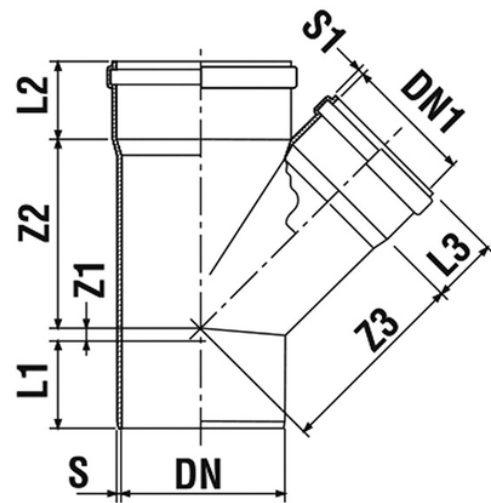

Reference	tootlimage	Colour	DN1 (mm)	S (mm)	S1 (mm)	Z1 (mm)	Z2 (mm)	Z3 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	DN (mm)	Version
08004P8	-	Black	40	3,0	3,0	9	52	52	49	45	45	40	-
08005P8	-	Black	50	3,2	3,2	14	70	70	48	40	40	50	-
03127P8	-	Black	50	3,2	3,2	-	85	-	42	45	-	75	-
08807P8	-	Black	75	3,2	3,2	15	93	93	51	45	45	75	-
03128P8	-	Black	50	5,5	3,0	10	77	100	53	53	45	90	High thicknes
08809P8	-	Black	90	3,0	22	119	119	56	54	54	3	90	-
08310P8	-	Black	40	3,0	3,0	-20	84	95	84	60	44	100	-
08330P8	-	Black	50	3,0	3,0	-14	90	101	72	60	46	100	-
08810P8	-	Black	100	3,2	3,2	25	131	131	60	53	53	100	-
08131P8	-	Black	50	5,3	2,0	-11	93	101	62,5	56,6	46,5	110	-
03151P8	-	Black	75	3,2	3,2	3	120	127	63	55	45	110	-
03011P8	-	Black	110	3,2	-	27	143	143	58	50	50	110	-
03192P8	-	Black	110	3,2	3,2	19	147	152	69	62	56	125	-
08012P8	-	Black	125	3,2	-	30	161	161	71	62	62	125	-
03116P8	-	Black	110	4,0	3,2	2	168	176	82	74	56	160	-

Branch 45° M/F

Reference	tooltipImage	Colour	DN1 (mm)	S (mm)	S1 (mm)	Z1 (mm)	Z2 (mm)	Z3 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	DN (mm)	Version
03016P8	-	Black	160	4,0	-	38	205	205	83	71	71	160	-