


ODB-SW

Steel core backing ring, PP/FRP coated, according to EN/ISO/DIN for stubs QRV and QPV. Drilling: PN 10/16 up to DN 150; PN 10 from DN 200.

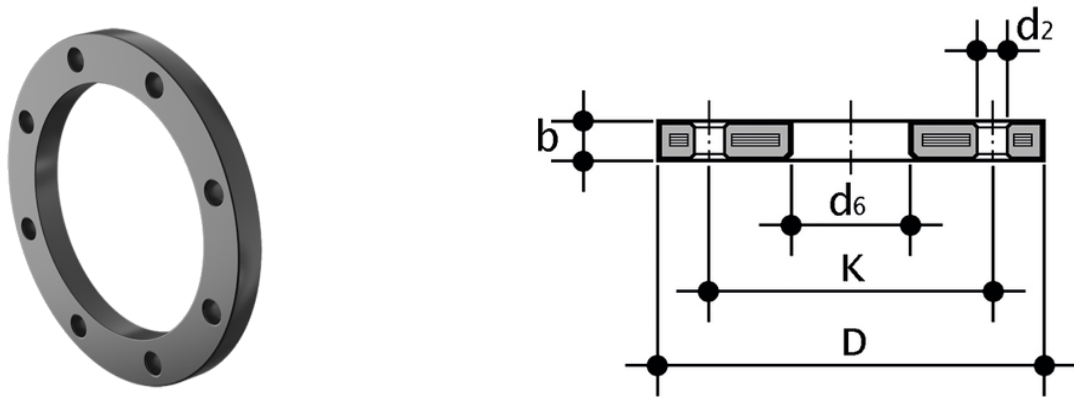

FOR QRC

Reference	tooltipImage	product.detail.attribute.textBelowTableText	system	Category	d	DN	PMA (bar)	b	D	d ₂	d ₆	k	M
SWOBD225DN200	-	*PMA maximum admissible working pressure **nominal tightening torque	Special parts and accessories	Flanges	225	200	16	27	340	22	247	295	M20

FOR QRV AND QPV

Reference	tooltipImage	product.detail.attribute.textBelowTableText	system	Category	d	DN	PMA (bar)	b	D	d ₂	d ₆	k	M
SWOBD140DN125	-	*PMA maximum admissible working pressure **nominal tightening torque	Special parts and accessories	Flanges	140	125	16	24	252	18	166	210	M16
SWOBD225DN200	-	*PMA maximum admissible working pressure **nominal tightening torque	Special parts and accessories	Flanges	225	200	16	27	340	22	248	295	M20
SWOBD280DN250	-	*PMA maximum admissible working pressure **nominal tightening torque	Special parts and accessories	Flanges	280	250	16	30	395	22	309	350	M24
SWOBD315DN300	-	*PMA maximum admissible working pressure **nominal tightening torque	Special parts and accessories	Flanges	315	300	16	34	445	22	349	400	M27