


FKOV/LM – Butterfly valve DN 40:400

Hand operated butterfly valve.

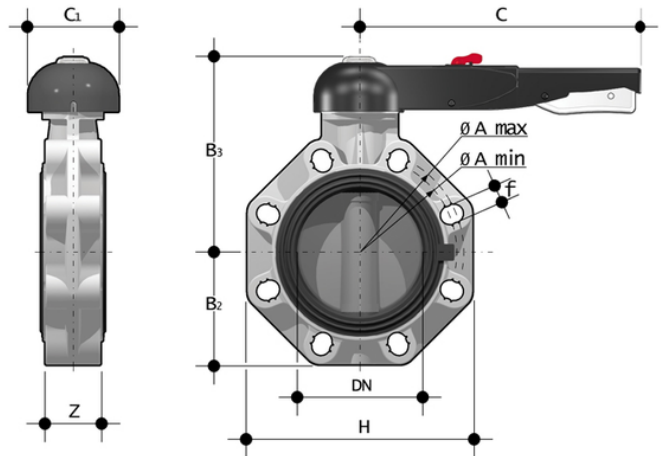

EPDM

Reference	tooltiplmage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z
FKOVLM050E	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	50 - 1 1/2"	40	16	99	109	60	137	175	100	132	4	33
FKOVLM063E	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	63 - 2"	50	16	115	125,5	70	143	175	100	147	4	43



FKOV/LM - Butterfly valve DN 40:400

Reference	tooltiplimage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z
FKOVLM075E	-	d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	75 - 2"1/2	65	10	128	144	80	164	175	110	165	4	46
FKOVLM090E	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	90 - 3"	80	10	145	160	93	178	272	110	185	12	49





FKOV/LM - Butterfly valve DN 40:400

Reference	tooltiplimage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z
FKOVLM110E	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	110 - 4"	100	10	165	190	107	192	272	110	211	8	56
FKOVLM140E	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	140 - 5"	125	10	204	215	120	212	330	110	240	8	64
FKOVLM160E	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	160 - 6"	150	10	230	242	134	225	330	110	268	8	70





FKOV/LM – Butterfly valve DN 40:400

Reference	tooltiplimage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z
FKOVLM225E	-	with special QPV FE-FK d200 for butterfly valve (QPV200FKE) Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	225 - 8"	200	10	280	298	161	272	420	122	323	8	71

FKM

Reference	tooltiplimage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z
FKOVLM050F	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	50 - 1 1/2"	40	16	99	109	60	137	175	100	132	4	33





FKOV/LM - Butterfly valve DN 40:400

Reference	tooltiplmage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z
FKOVLM063F	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	63 - 2"	50	16	115	125,5	70	143	175	100	147	4	43
FKOVLM075F	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	75 - 2 1/2"	65	10	128	144	80	164	175	110	165	4	46
FKOVLM090F	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	90 - 3"	80	10	145	160	93	178	272	110	185	12	49





FKOV/LM – Butterfly valve DN 40:400

Reference	tooltiplmage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z
FKOVL110F	-	with special QPV FE-FK d200 for butterfly valve (QPV200FKE) Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	110 - 4"	100	10	165	190	107	192	272	110	211	8	56
FKOVL140F	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	140 - 5"	125	10	204	215	120	212	330	110	240	8	64
FKOVL160F	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	160 - 6"	150	10	230	242	134	225	330	110	268	8	70





FKOV/LM - Butterfly valve DN 40:400

Reference	tooltiplmage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U	Z
FKOVLM225F	-	FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE) Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	225 - 8"	200	10	280	298	161	272	420	122	323	8	71

FKM

Reference	tooltiplmage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U
FKOVLMO50FOSF	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	50 - 1 1/2"	40	16	99	109	60	137	175	100	132	4





FKOV/LM - Butterfly valve DN 40:400

Reference	tooltiplmage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U
FKOVLMO63FOSF	-	d200 for butterfly valve (QPV200FKE) Note: for d75÷d225 NBR primary liner available * d125, FKOVL d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOVL d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	63 - 2"	50	16	115	125,5	70	143	175	100	147	4
FKOVLMO75FOSF	-	Note: for d75÷d225 NBR primary liner available * d125, FKOVL d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOVL d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	75 - 2 1/2"	65	10	128	144	80	164	175	110	165	4
FKOVLMO90FOSF	-	Note: for d75÷d225 NBR primary liner available * d125, FKOVL d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOVL d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	90 - 3"	80	10	145	160	93	178	272	110	185	12





FKOV/LM – Butterfly valve DN 40:400

Reference	tooltiplmage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U
		valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)															
FKOVLM110F0SF	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	110 - 4"	100	10	165	190	107	192	272	110	211	8
FKOVLM140F0SF	-	Note: for d75÷d225 NBR primary liner available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	140 - 5"	125	10	204	215	120	212	330	110	240	8
FKOVLM160F0SF	-	Note: for d75÷d225 NBR primary liner	PVC-U system	Manual valves	Butterfly valves	FK DN 40÷400	160 - 6"	150	10	230	242	134	225	330	110	268	8





FKOV/LM – Butterfly valve DN 40:400

Reference	tooltipImage	Other description	system	Category	family	series	d	DN	PN	A min	A max	B[5:2]	B[5:3]	C	C[5:1]	H	U
		available * d125, FKOV d140 with special QPV FE-FK d125 for butterfly valve (QPV125FKE) ** d200, FKOV d225 with special QPV FE-FK d200 for butterfly valve (QPV200FKE)															

FKOV/LM – Butterfly valve DN 40:400

- **Ergonomic handle** in HIPVC equipped with **locking and unlocking device, release, quick operation and graduated adjustment** in 10 intermediate positions (DN 40÷200). The operating range, starting from the first few degrees of valve opening, also guarantees extremely low pressure drops.
- **Customisable Labelling System:** integrated module in the handle, made of a transparent protection plug and a customisable tag holder using the LSE set (available as an accessory). The **customisation** lets you **identify the valve on the system** according to specific needs.
- **STAINLESS steel square section stem** completely isolated from the fluid complying with standard ISO 5211:
 - DN 40÷65: 11 mm
 - DN 80÷100: 14 mm
 - DN 125÷150: 17 mm
 - DN 200: 22 mm
 - DN 250÷400: 27 mm
- **Body** in polypropylene based **compound reinforced with fibreglass (PP-GR)** **resistant to UV rays** and characterised by **high mechanical strength**.
- **Drilling pattern using oval slots** that allow coupling to flanges according to numerous international standards. The special **self-centring inserts in ABS** supplied for DN 40÷200 guarantee the **correct axial alignment** of the valve during installation. For DN 250÷400 valves, the drilling pattern for the selfcentring system is of the traditional type according to DIN and ANSI standards.
- **Interchangeable liner** with the dual function of forming a hydraulic seal and isolating the body from the fluid.
- Interchangeable disk in PVC-U with through shaft, available in different thermoplastic materials: PP-H, PVC-C, ABS, PVDF
- Overall dimensions of the valve in accordance with standard ISO 5752 (DN 40÷200 Medium Series 25, DN 250÷ 300 Long Series 16) and DIN 3202 K2 and ISO 5752 (DN 65÷200 K2, DN 250÷300 K3)
- Can also be installed as an end line valve, bottom discharge valve or tank dump valve
- **Special Lug version** PN 10 fully drilled to DIN 2501 or ANSI B16.5 cl.150 with **molded-in AISI 316 STAINLESS steel threaded inserts**
- **Valve material compatibility** (PVC-U + EPDM) with water conveyance, drinking water and other food substances according to **current regulations**
- Possibility of installing a manual reducer or pneumatic and/or electric actuators by applying an ISO standard drilling PP-GR flanges. DN 40 ÷ 200 valve fitted with plate with rack in PP-GR. For actuated versions with flange drilled according to ISO 5211 F05, 07, F10. DN 250÷400 valve, fitted with one-piece top flange in high mechanical strength PP-GR with mounting flange for internal components drilled according to standard ISO 5211 F10 (excluding DN 350÷400), F12, F14.
- Possibility to have handle with integrated LSQT limit micro switch, even as a retrofit in existing installations