


CMIF/CP NC - Pneumatically actuated compact diaphragm valve DN 12:15

Pneumatically actuated diaphragm valve with metric plain socket ends for socket welding, Normally Closed.

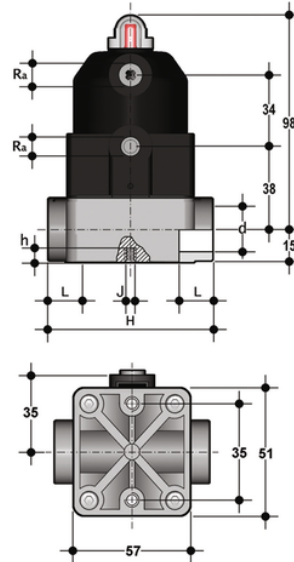

EPDM

| Reference | tootiplmage | system | Category | family | series | d | DN | PN | R _a | L | H | h | J | g |
|------------|-------------|-------------------|-------------------------------|------------------|----------------|----|----|----|----------------|----|----|---|----|-----|
| CMIFNC016E | - | Automation system | Pneumatically actuated valves | Diaphragm valves | CM/CP DN 12÷15 | 16 | 12 | 6 | G 1/4" | 14 | 75 | 8 | M5 | 360 |
| CMIFNC020E | - | Automation system | Pneumatically actuated valves | Diaphragm valves | CM/CP DN 12÷15 | 20 | 15 | 6 | G 1/4" | 16 | 75 | 8 | M5 | 360 |

FKM

| Reference | tootiplmage | system | Category | family | series | d | DN | PN | R _a | L | H | h | J | g |
|------------|-------------|-------------------|-------------------------------|------------------|----------------|----|----|----|----------------|----|----|---|----|-----|
| CMIFNC016F | - | Automation system | Pneumatically actuated valves | Diaphragm valves | CM/CP DN 12÷15 | 16 | 12 | 6 | G 1/4" | 14 | 75 | 8 | M5 | 360 |
| CMIFNC020F | - | Automation system | Pneumatically actuated valves | Diaphragm valves | CM/CP DN 12÷15 | 20 | 15 | 6 | G 1/4" | 16 | 75 | 8 | M5 | 360 |

PTFE

| Reference | tootiplmage | system | Category | family | series | d | DN | PN | R _a | L | H | h | J | g |
|------------|-------------|-------------------|-------------------------------|------------------|----------------|----|----|----|----------------|----|----|---|----|-----|
| CMIFNC016P | - | Automation system | Pneumatically actuated valves | Diaphragm valves | CM/CP DN 12÷15 | 16 | 12 | 6 | G 1/4" | 14 | 75 | 8 | M5 | 360 |
| CMIFNC020P | - | Automation system | Pneumatically actuated valves | Diaphragm valves | CM/CP DN 12÷15 | 20 | 15 | 6 | G 1/4" | 16 | 75 | 8 | M5 | 360 |

CMIF/CP NC – Pneumatically actuated compact diaphragm valve DN 12:15

The new compact and light piston actuator in PP-GR makes the CM/CP the ideal choice for applications requiring very frequent valve operation and a long valve lifetime.

- Compact and lightweight piston actuator in PP-GR, free of exposed metallic parts, particularly suited for use in severe environmental and chemically aggressive conditions.
- High strength IXEF piston guarantees high reliability over time without maintenance.
- High visibility graduated optical position indicator protected by a transparent cap with a seal O-Ring.
- The valve is impervious to fluids containing impurities
- It has an high flow rate
- It can be installed in any position
- It has an extremely compact structure
- It is actuated by a dry running piston and does not require maintenance
- It has no protruding screws and is fully free of impurity deposits
- Allows for an easy diaphragm seal replacement
- The Standard version valve comes with a position indicator.