


DKDUFV/CP NO – Pneumatically actuated 2-way diaphragm valve PN6 DN 15:65

Pneumatically actuated diaphragm valve with BSP threaded female union ends, Normally Open, Direct Acting.

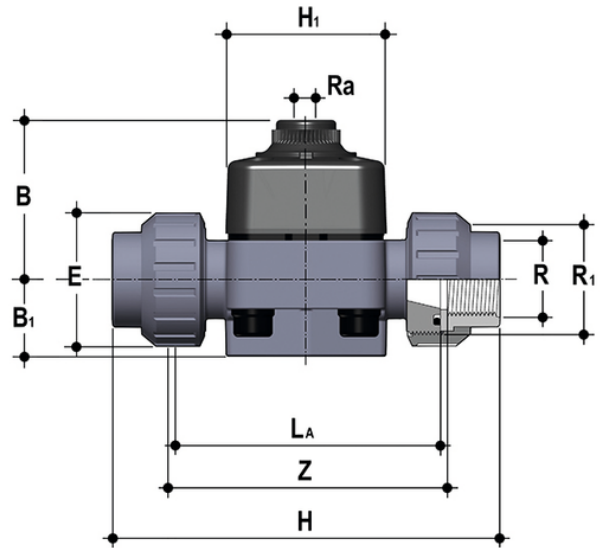

Reference	tooltiplmage	system	Category	family	series	R	DN	PN	B	B ₁	H	h	H ₁	L[5:a]	Z	E	R ₁
DKDUFVNO012E	-	Automation system	Pneumatically actuated valves	Diaphragm valves	DKD/CP DN 15÷65	1/2"	15	8	58	25	131	12	65	90	97	41	1"
DKDUFVNO034E	-	Automation system	Pneumatically actuated valves	Diaphragm valves	DKD/CP DN 15÷65	3/4"	20	8	61	29,5	151	12	65	108	118	50	1 1/4"
DKDUFVNO100E	-	Automation system	Pneumatically actuated valves	Diaphragm valves	DKD/CP DN 15÷65	1"	25	8	70	33	165	12	70	116	127	58	1 1/2"
DKDUFVNO112E	-	Automation system	Pneumatically actuated valves	Diaphragm valves	DKD/CP DN 15÷65	1 1/2"	40	8	87	35	208	16	99	154	165	79	2 1/4"
DKDUFVNO114E	-	Automation system	Pneumatically actuated valves	Diaphragm valves	DKD/CP DN 15÷65	1 1/4"	32	8	72	30	188	12	70	134	145	72	2"
DKDUFVNO200E	-	Automation system	Pneumatically actuated valves	Diaphragm valves	DKD/CP DN 15÷65	2"	50	8	109	46	246	16	114	184	195	98	2 3/4"

DKDUFV/CP NO – Pneumatically actuated 2-way diaphragm valve PN6 DN 15:65

The valve comprises three elements: body, diaphragm and sealing bonnet. Due to the action of the compressed air in the bonnet, the diaphragm is pressed against the body saddle interrupting the flow. This simplified operating principle and the lower number of components guarantees high reliability and durability.

- PP-GR sealing bonnet marked by high construction strength. The absence of metal parts exposed to the external environment prevents any risk of corrosion.
- The special sealing diaphragm reinforced with textile fibres allows longer operation to be reached without showing any signs of wear.
- New valve body internal design. Substantially higher flow coefficient and lower pressure drops. The degree of efficiency reached has also enabled the size and weight of the valve to be reduced.
- Connection system using solvent welded and threaded joints
- Optimised fluid dynamic design: maximum output flow rate thanks to the optimised efficiency of the fluid dynamics that characterise the new internal geometry of the body
- In the Standard version, equipped with textile fibre reinforced diaphragm
- Bonnet fastening screws in STAINLESS steel protected against the external environment by PE plugs
- Easy to clean valve interior
- Low risk of the accumulation of deposits, contamination or damage to the diaphragm due to crystallisation
- Easy to replace diaphragm seal.