


FSFV-Trogamid

Float: PP (Polypropylene) red

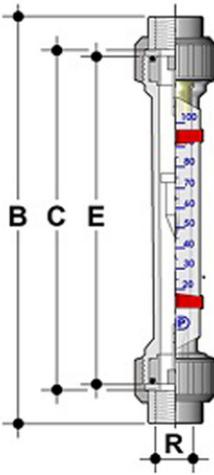

Reference	tooltiplmage	system	Category	family	series	R	Flow rate range for air Nm3/h	B	E	C
FSFV034D0M0004	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	3/4"	0,3 - 4	397	350	356
FSFV034D0M0010	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	3/4"	1 - 10	397	350	356
FSFV034D0M0025	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	3/4"	0,2 - 2,5	397	350	356
FSFV034D0M0065	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	3/4"	0,5 - 6,5	397	350	356
FSFV100D0M0004	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1"	0,4 - 4	401	350	356
FSFV100D0M0010	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1"	1 - 10	401	350	356
FSFV100D0M0016	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1"	1,5 - 16	401	350	356
FSFV100D0M0065	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1"	0,5 - 6,5	401	350	356
FSFV112D0M0025	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1 1/2"	2 - 25	413	350	356

FSFV-Trogamid

Reference	tooltiplmage	system	Category	family	series	R	Flow rate range for air Nm ³ /h	B	E	C
FSFV112D0M0040	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1"1/2	4 - 40	413	350	356
FSFV112D0M0050	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1"1/2	5 - 50	413	350	356
FSFV114D0M0016	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1"1/4	1,5 - 16	406	350	356
FSFV114D0M0025	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1"1/4	2 - 25	406	350	356
FSFV114D0M0040	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	1"1/4	4 - 40	406	350	356
FSFV200D0M0040	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	2"	4 - 40	421	350	356
FSFV200D0M0064	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	2"	6 - 64	421	350	356
FSFV200D0M0100	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	2"	10 - 100	421	350	356
FSFV212D0M0140	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	2"1/2	15 - 140	444	350	356
FSFV212D0M0200	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	2"1/2	20 - 200	444	350	356
FSFV212D0M0500	-	Variable area Flowmeters	Flowmeters - Standard range	Flowmeters - Threaded Connection	Gas scale - PP float	2"1/2	50 - 500	444	350	356

FSFV-Trogamid

- Metering tubes are available in Trogamid (PA) suitable for most inert media, PVC-U suitable for slight corrosive media and Polysulfone (PSU) suitable for corrosive media on an extended operating temperature range. End connectors available in PVC-U, PVC-C, PP, SS, Malleable Cast Iron. Male threads moulded onto the end of the metering tube are used for easy mounting of unions. Standard unions are in PVC-U but others are available according to the different working conditions; Metal unions widen the range of operating conditions such as pressure and temperature. The floats are available in Stainless Steel AISI 316 and in PP to match the proper chemical compatibility with the flow medium and to offer different measuring ranges. Magnetic Float option is available to be combined with micro switches for MIN and MAX alarm, clamped on the guide of the flowmeter. The micro switches, housing a bistable reed contact are activated by the passage of the magnet incorporated into the float. Flowmeters body are equipped with a double guide allowing the installation of two alarm in a very close position. Double scale option available for specific application requirements to customize measuring units for an easy conversion or comprehension of the flow rate values.
- Wide choice of measuring scales: water scale from 1,5 to 50.000 l/h, HCl scale from 1,4 to 23.000 l/h, NaOH 30% scale from 0,25 to 43.000 l/h, NaOH 50% scale from 0,025 to 40.000 l/h, Air scale from 0,025 to 500 Nm³/h • Wide choice of end connections available in PVC-U, PVC-C, PP-H, AISI 316 SS, Carbon Steel • Eight different diameters • Three different plastic tube materials: PA, PVC and PSU • Float materials available in SS and PP, with or without magnet • High level of accuracy: FS accuracy class 2,5; FC accuracy class 4 • Simple operation and very limited maintenance. • Other engineering units like LPM, m³/h or % together with double scales and special scales are available on request.