


C6.30 - Inductive conductivity transmitter

C-PVC Inductive Conductivity Transmitter with Temperature Sensor (Pt100) included.

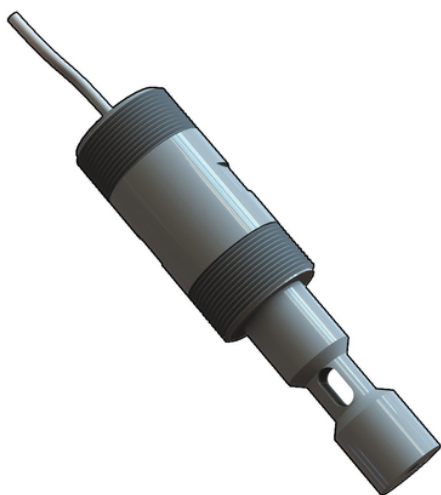

Reference	tooltiplImage	system	Category	family	series	Description	Operative Range	Connection	Installation
C6.30.01	-	Automation system	FLS Measurement and control Instrumentation	ph / ORP / Conductivity Electrodes	Potentiometric and Inductive Conductivity Sensors	Pt100 included	0-10 mS/cm	3 m	11/2" NPT male threaded
C6.30.02	-	Automation system	FLS Measurement and control Instrumentation	ph / ORP / Conductivity Electrodes	Potentiometric and Inductive Conductivity Sensors	Pt100 included	0-100 mS/cm	3 m	11/2" NPT male threaded
C6.30.03	-	Automation system	FLS Measurement and control Instrumentation	ph / ORP / Conductivity Electrodes	Potentiometric and Inductive Conductivity Sensors	Pt100 included	0-1000 mS/cm	3 m	11/2" NPT male threaded

C6.30 – Inductive conductivity transmitter

APPLICATIONS:

- Water treatment
- Waste water treatment
- Cooling towers
- Scrubber systems
- Metal finishing Coating and corrosion fluid measurement

MAIN FEATURES:

- Corrosion & coating resistant
- Compact transmitter
- No calibration required
- Easy installation
- Pt100 sensor integrated
- Suitable for submersible installation