


F3.00.H.XX

Paddlewheel Flow Sensor (Remote version)

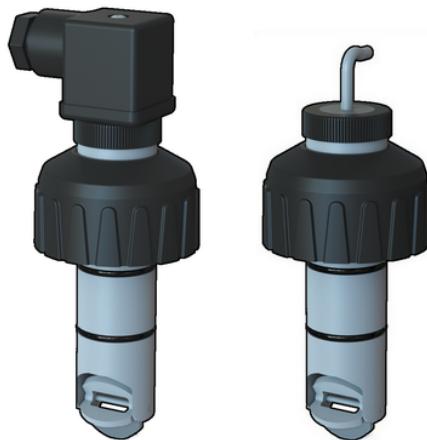

Reference	tooltiplimage	system	Category	family	series	Version	Power supply	Lenght	Main Wetted Materials	Enclosure	Flow Rate Range
F3.00.H.01	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	C-PVC \$ EPDM	IP68	From 0,15 to 8 m/s*
F3.00.H.02	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	C-PVC \$ FKM	IP68	From 0,15 to 8 m/s*
F3.00.H.03	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	C-PVC \$ EPDM	IP68	From 0,15 to 8 m/s*
F3.00.H.04	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	C-PVC \$ FKM	IP68	From 0,15 to 8 m/s*
F3.00.H.05	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	PVDF \$ EPDM	IP68	From 0,15 to 8 m/s*

F3.00.H.XX

Reference	tooltiplimage	system	Category	family	series	Version	Power supply	Lenght	Main Wetted Materials	Enclosure	Flow Rate Range
F3.00.H.06	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	PVDF \$ FKM	IP68	From 0,15 to 8 m/s*
F3.00.H.07	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	PVDF \$ EPDM	IP68	From 0,15 to 8 m/s*
F3.00.H.08	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	PVDF \$ FKM	IP68	From 0,15 to 8 m/s*
F3.00.H.09	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	316L SS \$ EPDM	IP68	From 0,15 to 8 m/s*
F3.00.H.10	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	316L SS \$ FKM	IP68	From 0,15 to 8 m/s*
F3.00.H.11	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	316L SS \$ EPDM	IP68	From 0,15 to 8 m/s*
F3.00.H.12	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	316L SS \$ FKM	IP68	From 0,15 to 8 m/s*
F3.00.H.13	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	C-PVC \$ EPDM	IP65	From 0,15 to 8 m/s*
F3.00.H.14	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	C-PVC \$ FKM	IP65	From 0,15 to 8 m/s*
F3.00.H.15	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and	Hall	5 - 24 VCC	L1	C-PVC \$ EPDM	IP65	From 0,15 to 8 m/s*

F3.00.H.XX

Reference	tooltipImage	system	Category	family	series	Version	Power supply	Lenght	Main Wetted Materials	Enclosure	Flow Rate Range
					Electromagnetic Flow Sensors						
F3.00.H.16	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	C-PVC \$ FKM	IP65	From 0,15 to 8 m/s*
F3.00.H.17	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	PVDF \$ EPDM	IP65	From 0,15 to 8 m/s*
F3.00.H.18	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	PVDF \$ FKM	IP65	From 0,15 to 8 m/s*
F3.00.H.19	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	PVDF \$ EPDM	IP65	From 0,15 to 8 m/s*
F3.00.H.20	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	PVDF \$ FKM	IP65	From 0,15 to 8 m/s*
F3.00.H.21	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	316L SS \$ EPDM	IP65	From 0,15 to 8 m/s*
F3.00.H.22	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L0	316L SS \$ FKM	IP65	From 0,15 to 8 m/s*
F3.00.H.23	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	316L SS \$ EPDM	IP65	From 0,15 to 8 m/s*
F3.00.H.24	-	Automation system	FLS Measurement and control Instrumentation	Flow sensors	Insertion Paddlewheel and Electromagnetic Flow Sensors	Hall	5 - 24 VCC	L1	316L SS \$ FKM	IP65	From 0,15 to 8 m/s*

F3.00.H.XX

APPLICATIONS:

- Water treatment and regeneration
- Industrial wastewater treatment and recovery
- Textile finishing
- Water distribution
- Processing and manufacturing industry
- Filtration systems
- Chemical production
- Liquid delivery systems
- Cooling water monitoring
- Heat Exchangers
- Swimming pools
- Pump protection

MAIN FEATURES:

- C-PVC, PVDF or Stainless Steel sensor body
- Two sensor lengths to cover from DN15 up to DN600
- Easy insertion system
- IP65 or IP68 protection class
- Measurement range over 50:1
- High chemical resistance
- Version for battery powered system
- Push-Pull output for universal electrical connection