

VAM RG

Valve tapping saddle with transition HD-PE/gunmetal


Valve tapping saddle with transition HD-PE/gunmetal VAM RG

- Gas, water
- Working pressure: MOP (gas) 10 bar, PFA (water) 16 bar
- Material: PE 100 and gunmetal (female thread)
- Saddle component with clamp
- Safety technology
- Metals in contact with water according to UBA recommendation

Note:

For accommodating commercially available brass valves.

As a complete solution, we recommend our DAV tapping valve.

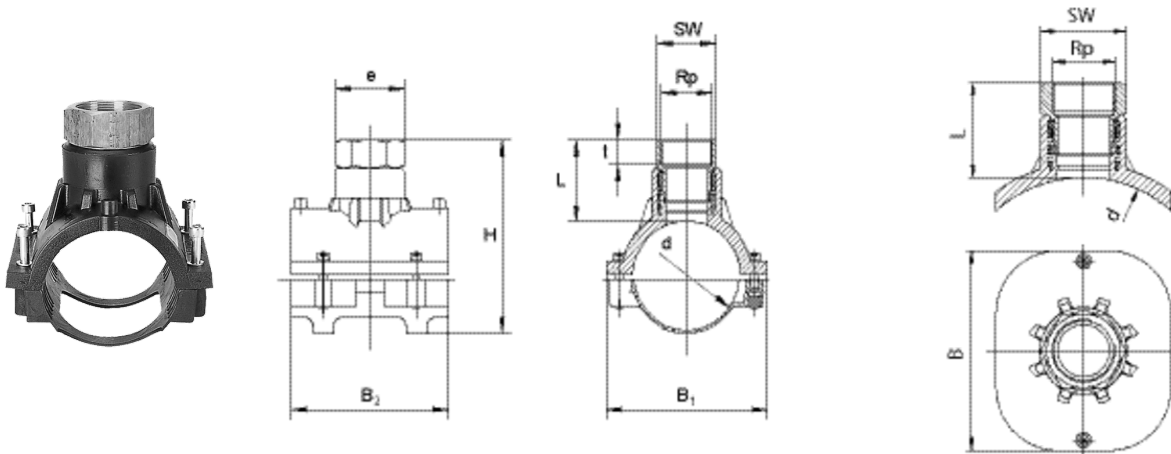

PE 100 SDR 11

Maximum permissible working pressure 16 bar (water) / 10 bar (gas)



Reference	d	Rp	BX	PU	L	t	H	B1	e	Weight kg
612794	63	1 1/4"	20	360	75	23	146	108	58	0,730
612743	63	1 1/2"	20	360	78	23	149	108	64	0,780
615213	75	1 1/4"	15	270	76	23	161	110	58	0,850
612798	90	1 1/2"	16	128	68	27	172	155	81	1,380
612778	90	2"	16	128	95	27	199	155	81	1,570
612732	110	1 1/2"	12	96	70	27	182	178	81	1,520
612733	110	2"	12	96	92	27	205	178	81	1,730
612734	125	1 1/2"	12	96	68	27	207	190	81	1,610
612735	125	2"	12	96	95	27	234	190	81	1,820
612728	160	1 1/2"	8	64	68	27	242	225	81	1,810
612729	160	2"	8	64	95	27	269	225	81	2,040

VAM RG

Valve tapping saddle with transition HD-PE/gunmetal

Reference	d	Rp	BX	PU	L	t	H	B1	e	Weight kg
612827	225	2"	5	40	95	27	322	255	81	2,000

FRIALEN safety fittings can be fused with pipes with SDR levels 11 to 17.6.

DVGW test marks issued: DV-7501AU2257 and DV-7501AU2258.

1) Saddle mouldings d 63 can only be fused with pipes of the SDR level 11.

*as a complete solution we recommend our DAV pressure drilled valve

VAM RG

Valve tapping saddle with transition HD-PE/gunmetal

Areas of Application

FRIALEN-Valve Tapping Saddles VAM-RG and VAM-RG-TL are used for acceptance of normal commercial brass valves.

Assembly Instructions

VAM-RG

After scraping and cleaning of the pipe which is being fused and cleaning of the internal surface of the FRIALEN-Valve Tapping Saddle the Valve Tapping Saddle is screwed with the bottom section tightly to the HDPE pipe (see Assembly Instructions for "FRIALEN-Safety Fittings for house connections and distribution pipes up to d 225").

VAM-RG-TL

The preparation of the surfaces to be fused is the same as for VAM-RG. The saddle is clamped onto the pipe with the FRIATOP clamping device (see pricelist "Technical Equipment"). Please read the "Assembly and Operating Instructions for FRIATOP clamping unit (Top-Loading)". Fusion takes place by FRIAMAT-fusing.

Eight good reasons for using the FRIALEN-Valve Tapping Saddles:

- Compact construction
- HDPE saddle with exposed heating element for optimal heat transfer
- Gunmetal adapter permanently anchored in the HDPE
- To accept normal commercial brass valves
- Tapping area free of heating wires
- Thread to DIN EN 10226-1, ISO 7-1
- Type VAM-RG-TL can be applied universally to large HDPE pipe diameters d 250-315 (560). This means additional economy due to less material needed and less stock both with suppliers and trade
- Additional barcode for tracing back the underground fitting (Traceability-Coding)