


FWSG 400

Ξύστρα για σωλήνες d 20 - d 63 (1/2" - 2" IPS)

For the reliable removal of the oxide layer of HDPE and PE-Xa pipes. Scraper blade made of carbide with 2 edges (twice the service life). Consistent swarf removal due to spring mounted scraper blade and automatic feed. With quick adjustment of the scraping length and exchangeable clamping slide for the dimensions d 75 - d 225 and d 250 - d 400. The tool is delivered in a transport box.

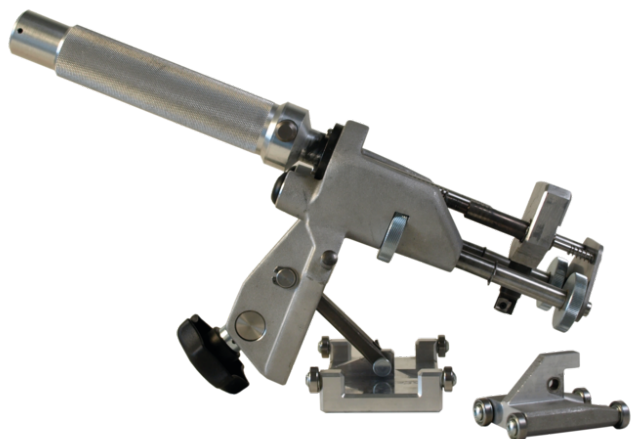

Κωδικός προϊόντος	Article description	Diameter Area	BX	PU	Weight kg
613410	FWSG 400	d 75 - d 400	1	40	4,840

FWSG 400

Ξύστρα για σωλήνες d 20 - d 63 (1/2" - 2" IPS)

Application

FRIATOOLS scraper tools for the perfect preparation of HDPE pipe surfaces: Consistently uniform removal of oxide layers for the perfect electrofusion.

The crucial difference

Having the correct tools to perform installation on site makes all the difference. We see ourselves as specialists in the electrofusion of HDPE piping systems, so our development work has also included equipment and accessories for your needs from the very outset.

We know exactly what matters and what is needed in the field, and we can offer you a range of equipment tailored to the daily challenges encountered on the building site:

FRIATOOLS scraper tools for all pipe diameters and for a wide range of scrape lengths and saddle surfaces. These safeguard a uniform removal of material and reproducible quality for the optimal processing and reliable fusion of HDPE pipes.

Put your trust in tools that produce the perfect results.

Good reasons for the FRIATOOLS scraper tool FWSG 400:

Reliable removal of oxide layers on PE 80, PE 100, and PE-X pipes

NEW: With quick adjustment of the scraping length

NEW: Replacement blade with 2 cutting edges for twice the service life

With easy exchangeable clamping slide for the dimensions d 75 - d 225 (3" - 8" IPS) and d 250 - d 400 (10" - 14" IPS).

Automatic compensation of pipe ovalities and tolerances due to spring mounted scraper blade

Consistent swarf removal due to automatic feed

Easy handling with little effort

Maintenance-friendly due to use of wear-resistant materials

The tool is delivered in a transport box