


# CBE SDR17 - End cap

End cap, short spigot for butt welding SDR 17 - S8.

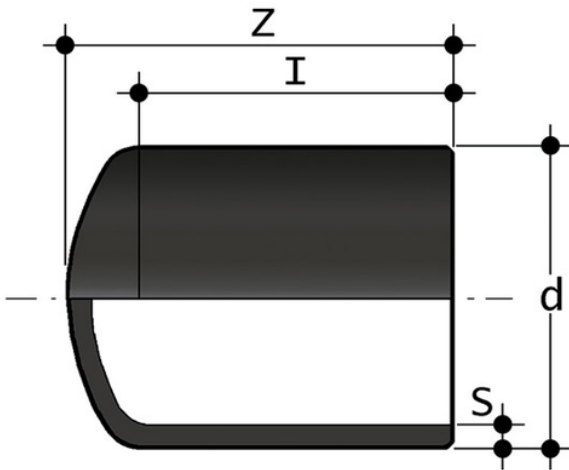

Reference	tooltiplmage	Other description	system	Category	family	series	d	Z	I	S	g
CBE17450	-	* resale products Per other dimensions refer to CDE	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Short-spigot-for-butt-welding	*450	85	20	26,7	10500
CBE17500	-	* resale products Per other dimensions refer to CDE	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Short-spigot-for-butt-welding	*500	90	18	29,7	14200
CBE17560	-	* resale products Per other dimensions refer to CDE	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Short-spigot-for-butt-welding	*560	100	19	33,2	20000
CBE17630	-	* resale products Per other dimensions refer to CDE	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Short-spigot-for-butt-welding	*630	110	19	37,4	28300
CBE17710	-	* resale products Per other dimensions refer to CDE	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Short-spigot-for-butt-welding	*710	130	26	42,1	33500
CBE17800	-	* resale products Per other dimensions refer to CDE	PE Pipe and Fittings	Pressure Fittings	ISO-UNI Fittings	Short-spigot-for-butt-welding	*800	140	23	47,4	47500

## CBE SDR17 – End cap

- Size range:  $d 12 \div d 800$  (mm)
- Nominal pressure: SDR 17 (PN10) with water at 20 °C, SDR 11 (PN16) with water at 20 °C
- Temperature range:  $-40 \text{ °C} \div 60 \text{ °C}$
- Coupling standards – Reference standards:
  - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
  - Flanging system: ISO 7005-1, EN 1092-1, EN ISO 15494, ANSI B16.5 cl.150
  - Construction criteria: UNI EN ISO 15494
  - Test methods and requirements: UNI EN ISO 15494
  - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD
- Seal material: EPDM, FKM