


CDE SDR11 - End cap

End cap, long spigot for butt welding SDR 11 - S5.

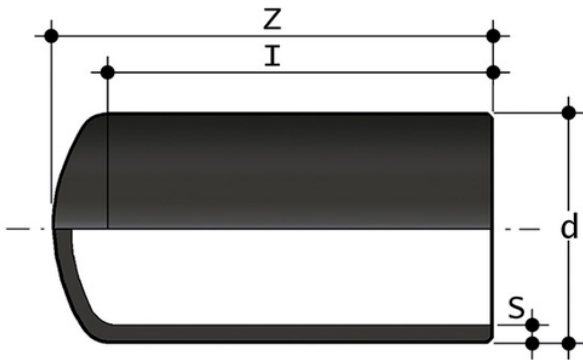

| Reference | tooltiplmage | Other description | system | Category | family | series | d | Z | I | S | g |
|-----------|--------------|-------------------|----------------------|-------------------|------------------|--|------|-----|-----|------|------|
| CDE11025 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *25 | 50 | 41 | 2,3 | 9 |
| CDE11032 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *32 | 56 | 46 | 2,9 | 15 |
| CDE11040 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *40 | 61 | 49 | 3,7 | 27 |
| CDE11050 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *50 | 71 | 58 | 4,6 | 47 |
| CDE11063 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *63 | 84 | 66 | 5,8 | 84 |
| CDE11075 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *75 | 94 | 73 | 6,8 | 134 |
| CDE11090 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *90 | 109 | 82 | 8,2 | 234 |
| CDE11110 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *110 | 122 | 88 | 10,0 | 406 |
| CDE11125 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *125 | 128 | 93 | 11,4 | 530 |
| CDE11140 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *140 | 136 | 97 | 12,7 | 715 |
| CDE11160 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *160 | 156 | 108 | 14,6 | 1085 |

CDE SDR11 - End cap

| Reference | tooltiplmage | Other description | system | Category | family | series | d | Z | l | S | g |
|-----------|--------------|-------------------|----------------------|-------------------|------------------|--|------|-----|-----|------|-------|
| CDE11180 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *180 | 167 | 113 | 16,4 | 1430 |
| CDE11200 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *200 | 180 | 117 | 18,2 | 1930 |
| CDE11225 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *225 | 203 | 127 | 20,5 | 2730 |
| CDE11250 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *250 | 217 | 138 | 22,7 | 3645 |
| CDE11280 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *280 | 239 | 151 | 25,4 | 4975 |
| CDE11315 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *315 | 256 | 158 | 28,6 | 6865 |
| CDE11355 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *355 | 291 | 175 | 32,2 | 9710 |
| CDE11400 | - | * resale products | PE Pipe and Fittings | Pressure Fittings | ISO-UNI Fittings | Long-spigot-for-butt-welding-and-electrofusion | *400 | 316 | 193 | 36,3 | 13530 |

CDE SDR11 – End cap

- Size range: $d 12 \div d 800$ (mm)
- Nominal pressure: SDR 17 (PN10) with water at 20 °C, SDR 11 (PN16) with water at 20 °C
- Temperature range: $-40 \text{ °C} \div 60 \text{ °C}$
- Coupling standards – Reference standards:
 - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
 - Flanging system: ISO 7005-1, EN 1092-1, EN ISO 15494, ANSI B16.5 cl.150
 - Construction criteria: UNI EN ISO 15494
 - Test methods and requirements: UNI EN ISO 15494
 - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD
- Seal material: EPDM, FKM